



General tolerance
Section Direction
6 or below ± 0.3
6 to 15 or below ± 0.4
15 to 30 or below ± 0.7
30 to 50 or below ± 0.6
Longitudinal
120 or below ± 0.8
120 to 400 or below ± 1.5
400 to 1000 or below ± 3.0




Side view (1/1)

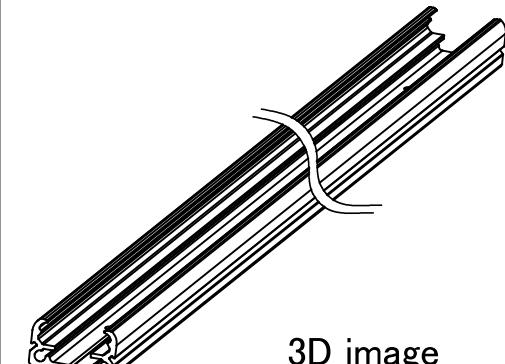

3D image

Tolerances are at 25° C.

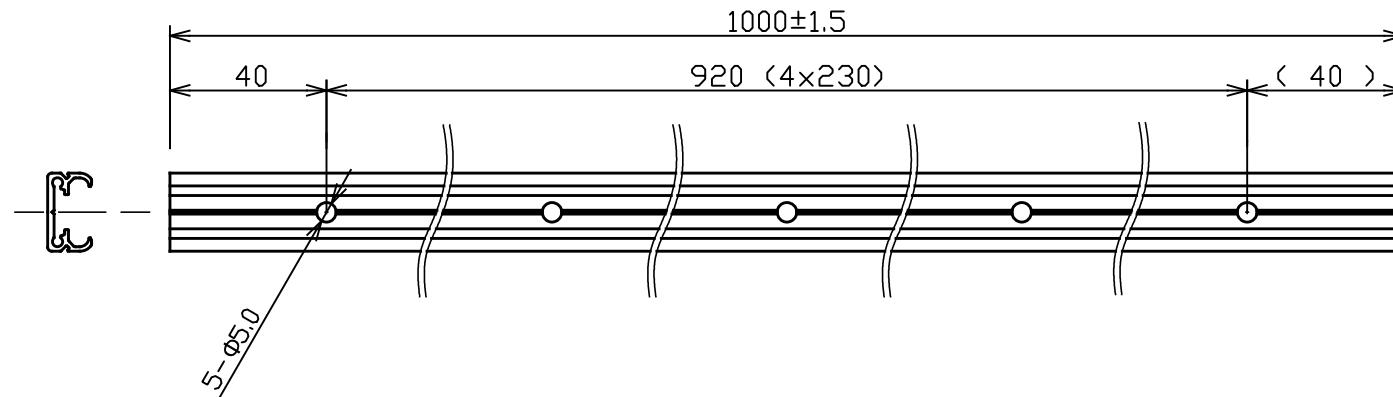

Installation precautions:

1. This is a straight channel exclusively for **Tape Light Diffuser Indoor** (TMVD). Do not use with other fixtures.
2. Be sure to secure the fixture with screws.
3. The minimum bending radius of the fixture must be R150mm or more in the direction perpendicular to the light axis.
4. When mounting vertically to a wall, follow the instructions in the instruction manual and use an appropriate L-shaped bracket at the bottom to prevent the fixture from slipping off.
Be careful not to pinch the lead wires.
5. Screws are not included. Please prepare commercially available screws according to the installation target.

Recommended screw examples)

When fixing to wood: Wood screws (nominal diameter 4.1, Round Head)

Unit (mm)					
1	Straight Channel		1		
Parts Name			Quantity		
Specifications			Model Name		
RoHS compliant Weight:175g			Tape Light Diffuser Indoor		
Scale	Drawn	Reviser	Approved		
1 : 2 (A4 Size)	Kawasaki		Tanimizu		
	2025.11.11		2025.11.11		
			Product No.		
			FAS00-01TD3		