


LONG SILICONE LIGHT

WHITE LEDS / MONO COLOR LEDS

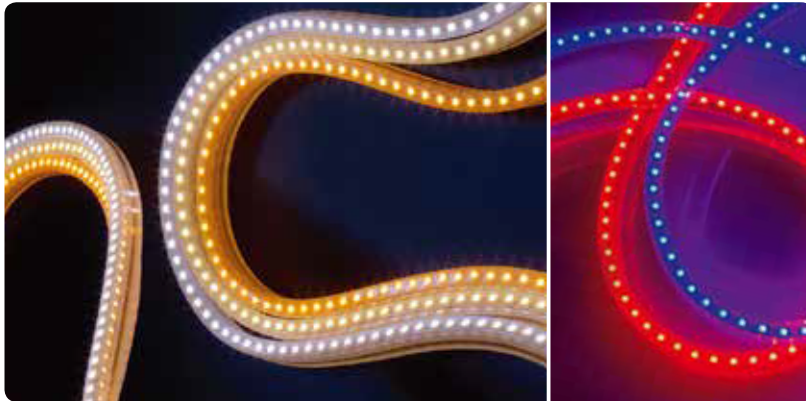

KEY FEATURES AND BENEFITS

- **IP67 Rated flexible LED Strip with Side-Bend**
- **9 color variation**
- **Customizable 84 different lengths**
- **Patented Unique Design Structure**
- **Uniformed brightness with Copper wires**
- **LEDs sealed by Silicone**
- **Installation** : See ACCESSORIES for options on straight and flexible mounting channels.
- **Environment** : Exterior. IP67 rated. Water and dust resistant. Proper drainage required. Product should not reside in standing water. Not for use as a submersible light source.
- **Power and Control** : DMX-512, DALI on/off, and dimming control options. Contact factory for more information.

ORDERING

PRODUCT No.

GL	10	-	96 A1	25K	5050
1	2		3	4	5
PRODUCT	OUTPUT		LED COLOR	LEAD WIRES	LENGTH

1	PRODUCT
	GL10-A Long Silicone Light
2	OUTPUT
	10 LED 10 mm pitch

3	LED COLOR
	22K 2200K
	25K 2500K
	28K 2800K
	30K 3000K
	35K 3500K
	40K 4000K
	50K 5000K
	RXK RED
	BXK BLUE

4	LEAD WIRES
	- Lead wires at one end.
	W Lead wires at both ends.

5	LENGTH
	See length ordering guide.

PRODUCT SPECIFICATIONS

LEDS	96/m
LED PITCH	10 mm
2200K	430 lm/m
2500K	750 lm/m
2800K	810 lm/m
3000K	840 lm/m
3500K	950 lm/m
4000K	990 lm/m
5000K	960 lm/m
RED	300 lm/m
BLUE	430 lm/m
YELLOW	1030 lm/m
INPUT	24VDC
WATTS	11 W/m (Red : 9 W/m)
WIDTH ¹	9 mm
HEIGHT ¹	16 mm
LENGTH ²	70mm ~ 5050 mm
WEIGHT	160 g (5.6 oz) per meter
BEAM ANGLE	120°
TRIM POINTS	Every 60mm
Max Unit Connectable	10.1 m(5055 m×2)
Bending Radius	30 mm horizontal
Operating Temperature	-10° to 55° C

¹ End cap is 13x20 mm.
² Standard. See LENGTH ORDERING GUIDE.

PRODUCT No.

Standard	"W" Type ¹	LED COLOR
GL10-96A122K	GL10-96A122KW	2200K
GL10-96A125K	GL10-96A125KW	2500K
GL10-96A128K	GL10-96A128KW	2800K
GL10-96A130K	GL10-96A130KW	3000K
GL10-96A135K	GL10-96A135KW	3500K
GL10-96A140K	GL10-96A140KW	4000K
GL10-96A150K	GL10-96A150KW	5000K
GL10-96AIRXK	GL10-96AIRXKW	RED
GL10-96AIBXK	GL10-96AIBXKW	BLUE

¹Lead wires at both ends" Type

LONG SILICONE LIGHT

WHITE LEDS / MONO COLOR LEDS


LENGTH ORDER CODE GUIDE (LENGTHS INCLUDE END CAPS.)

WHITE LED GL10 OUTPUT MODELS

MM	MM	MM	MM	MM	MM
70	910	1750	2590	3430	4270
130	970	1810	2650	3490	4330
190	1030	1870	2710	3550	4390
250	1090	1930	2770	3610	4450
310	1150	1990	2830	3670	4510
370	1210	2050	2890	3730	4570
430	1270	2110	2950	3790	4630
490	1330	2170	3010	3850	4690
550	1390	2230	3070	3910	4750
610	1450	2290	3130	3970	4810
670	1510	2350	3190	4030	4870
730	1570	2410	3250	4090	4930
790	1630	2470	3310	4150	4990
850	1690	2530	3370	4210	5050

DIMENSIONS

GL10 MODELS

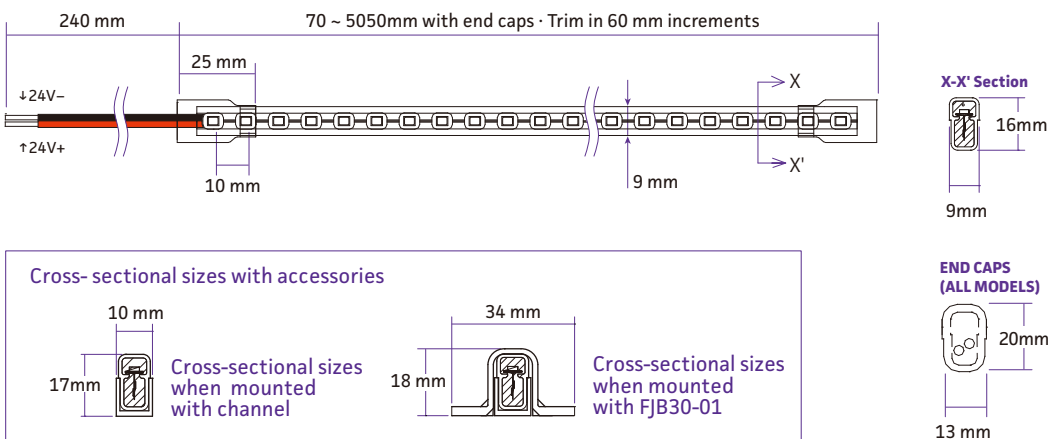

ACCESSORIES ¹

ALUMINUM CHANNELS

- FAS00-01S**
Rigid channel for straight line installations.
Weight : 80g
- FAC10-01S**
Flexible channel for curvy line installations.
Weight : 80g
W x H x L : 10 x 10.5 x 1000 mm



POLYCARBONATE MOUNTING BRACKET

- FJB30-01 (Qty: 4pcs per pack)**
Mounting bracket.
UV stabilized polycarbonate.
Installed with screws (supplied by others).
Please use 4pcs per meter with AL channel.
- Weight : 3g/PC
W x H x L : 34 x 15 x 18 mm



¹ Both accessories (channels and brackets) must be used together when installing this product. See INSTALLATION.