


Length of the Products and Wires

Product	GLS-2/GLSD(White)
----------------	--------------------------

Power consumption: 9.8W/m
Maximum series connectios length 10m

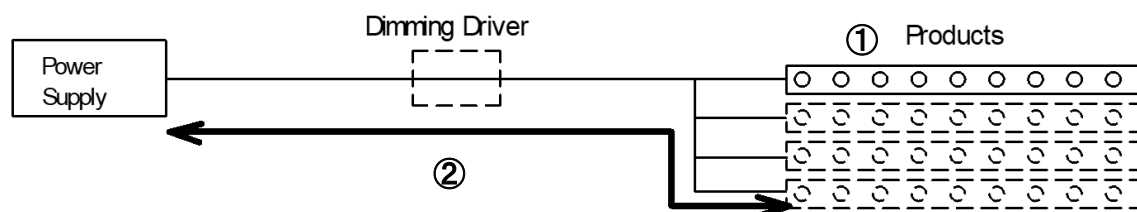

①Connectable Total Length of the Products. (When use HLG power supply)

- Please use the power supply at 70% output, for the long tern reliability.
- If total length of the products exceed "Maximum series connectios length", connect them in parallel.

Power supply	Rated output	Recommended output	Connectable Length
HLG-60H-24	60.0 W	42.0 W	4.3 m
HLG-100H-24	96.0 W	67.0 W	6.8 m
HLG-150H-24	150.0 W	105.0 W	10.7 m
HLG-240H-24	240.0 W	168.0 W	17.1 m
HLG-320H-24	320.0 W	224.0 W	22.9 m
-	-	-	-
-	-	-	-

②Recommended longest wire length

The maximum wiring length from power supply to light fixture (via dimming driver) is recommended as follows:

- When parallel connecting, each wiring lengths should be less than the maximum recommended wiring length, and even as possil
- "Total Product Length" in the table below is the total length of products, including parallel and series connections.
- When long lamps is necessary, divide them in parallel not to exceed "maximum series connection length".
- Use a power supply that have "Recommendde output" that is greater than "Total power consumption".


Cable Cores: 2C		VCTF/Twisted wire (mm ²)			VVF/Single Wire (φmm)		
Total Product	Total Power consumption	0.75sq/2C	1.25sq/2C	2sq/2C	1.6mm/2C	2mm/2C	2.6mm/2C
0.5 m	4.9 W	52 m	86 m	138 m	138 m	216 m	365 m
1.0 m	9.8 W	26 m	43 m	69 m	69 m	108 m	183 m
1.5 m	14.7 W	17 m	29 m	46 m	46 m	72 m	122 m
2.0 m	19.6 W	13 m	21 m	34 m	35 m	54 m	91 m
2.5 m	24.5 W	10 m	17 m	28 m	28 m	43 m	73 m
3.0 m	29.4 W	9 m	14 m	23 m	23 m	36 m	61 m
3.5 m	34.3 W	7 m	12 m	20 m	20 m	31 m	52 m
4.0 m	39.2 W	6 m	11 m	17 m	17 m	27 m	46 m
4.5 m	44.1 W	6 m	10 m	15 m	15 m	24 m	41 m
5.0 m	49.0 W	5 m	9 m	14 m	14 m	22 m	37 m
5.5 m	53.9 W	5 m	8 m	13 m	13 m	20 m	33 m
6.0 m	58.8 W	4 m	7 m	11 m	12 m	18 m	30 m
6.5 m	63.7 W	4 m	7 m	11 m	11 m	17 m	28 m
7.0 m	68.6 W	4 m	6 m	10 m	10 m	15 m	26 m
7.5 m	73.5 W	3 m	6 m	9 m	9 m	14 m	24 m
8.0 m	78.4 W	3 m	5 m	9 m	9 m	14 m	23 m
8.5 m	83.3 W	3 m	5 m	8 m	8 m	13 m	21 m
9.0 m	88.2 W	3 m	5 m	8 m	8 m	12 m	20 m
9.5 m	93.1 W	3 m	5 m	7 m	7 m	11 m	19 m
10.0 m	98.0 W	3 m	4 m	7 m	7 m	11 m	18 m

Above are approximate values.

Length of the Products and Wires

Product	GLS-2/GLSD(Blue_Red)
---------	----------------------

Power consumption: 9.0W/m
Maximum series connectios length 10m

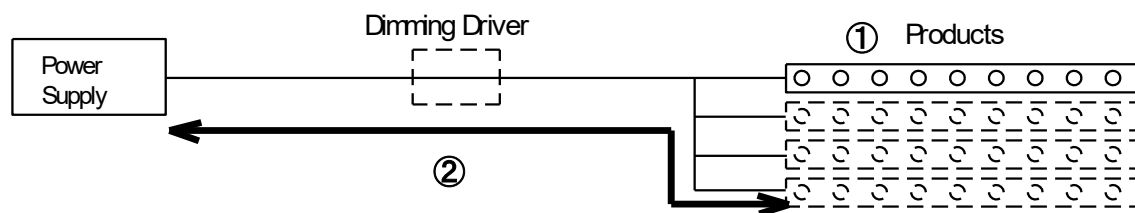

①Connectable Total Length of the Products. (When use HLG power supply)

- Please use the power supply at 70% output, for the long term reliability.
- If total length of the products exceed "Maximum series connectios length", connect them in parallel.

Power supply	Rated output	Recommended output	Connectable Length
HLG-60H-24	60.0 W	42.0 W	4.7 m
HLG-100H-24	96.0 W	67.0 W	7.4 m
HLG-150H-24	150.0 W	105.0 W	11.7 m
HLG-240H-24	240.0 W	168.0 W	18.7 m
HLG-320H-24	320.0 W	224.0 W	24.9 m
-	-	-	-
-	-	-	-

②Recommended longest wire length

The maximum wiring length from power supply to light fixture (via dimming driver) is recommended as follows:

- When parallele connecting, each wiring lengths should be less than the maximum recommended wiring length, and even as poss
- "Total Product Length" in the table below is the total length of products, including parallel and series connections.
- When long lamps is necessary, divide them in parallel not to exceed "maximum series connection length".
- Use a power supply that have "Recommende output" that is greater than "Total power consumption".

Cable Cores: 2C		VCTF/Twisted wire (mm ²)			VVF/Single Wire (φmm)		
Product Length	Power consumption	0.75sq/2C	1.25sq/2C	2sq/2C	1.6mm/2C	2mm/2C	2.6mm/2C
0.5 m	4.5 W	56 m	94 m	150 m	151 m	235 m	397 m
1.0 m	9.0 W	28 m	47 m	75 m	75 m	118 m	199 m
1.5 m	13.5 W	19 m	31 m	50 m	50 m	78 m	132 m
2.0 m	18.0 W	14 m	23 m	37 m	38 m	59 m	99 m
2.5 m	22.5 W	11 m	19 m	30 m	30 m	47 m	79 m
3.0 m	27.0 W	9 m	16 m	25 m	25 m	39 m	66 m
3.5 m	31.5 W	8 m	13 m	21 m	22 m	34 m	57 m
4.0 m	36.0 W	7 m	12 m	19 m	19 m	29 m	50 m
4.5 m	40.5 W	6 m	10 m	17 m	17 m	26 m	44 m
5.0 m	45.0 W	6 m	9 m	15 m	15 m	24 m	40 m
5.5 m	49.5 W	5 m	9 m	14 m	14 m	21 m	36 m
6.0 m	54.0 W	5 m	8 m	12 m	13 m	20 m	33 m
6.5 m	58.5 W	4 m	7 m	12 m	12 m	18 m	31 m
7.0 m	63.0 W	4 m	7 m	11 m	11 m	17 m	28 m
7.5 m	67.5 W	4 m	6 m	10 m	10 m	16 m	26 m
8.0 m	72.0 W	4 m	6 m	9 m	9 m	15 m	25 m
8.5 m	76.5 W	3 m	6 m	9 m	9 m	14 m	23 m
9.0 m	81.0 W	3 m	5 m	8 m	8 m	13 m	22 m
9.5 m	85.5 W	3 m	5 m	8 m	8 m	12 m	21 m
10.0 m	90.0 W	3 m	5 m	7 m	8 m	12 m	20 m

Above are approximate values.