

TSUBAKI SEAMLESS LIGHT MINI TYPE H UPDATE WHITE LEDS

- DC 24V
- Indoor Outdoor
- IP67
- Dimmable
- Silicone Rubber Sealed
- Customizable
- Cuttable



KEY FEATURES AND BENEFITS

- IP67 Rated flexible LED Strip
- Customizable 76 different lengths
- Side-Bend
- Only 9mm Width
- Diffused type
- Optimum for Direct Lighting
- Dimmable with DMX / DALI
- LEDs sealed by Silicone
- **Installation** : See ACCESSORIES for options on straight channel and mounting bracket.
- **Environment** : Exterior. IP67 rated. Water and dust resistant. Proper drainage required. Product should not reside in standing water. Not for use as a submersible light source.

ORDERING

PRODUCT No.

GLSD - **30K** **5064.0**

1 PRODUCT 2 LED COLOR 3 LEAD WIRES 4 LENGTH

1 PRODUCT	GLSD Tsubaki Seamless Light Mini Type H																		
2 LED COLOR	<table style="width: 100%; border-collapse: collapse;"> <tr><td style="border-bottom: 1px solid black;">25K</td><td>2500K</td></tr> <tr><td style="border-bottom: 1px solid black;">28K</td><td>2800K</td></tr> <tr><td style="border-bottom: 1px solid black;">30K</td><td>3000K</td></tr> <tr><td style="border-bottom: 1px solid black;">35K</td><td>3500K</td></tr> <tr><td style="border-bottom: 1px solid black;">40K</td><td>4000K</td></tr> <tr><td style="border-bottom: 1px solid black;">50K</td><td>5000K</td></tr> <tr><td style="border-bottom: 1px solid black;">60K</td><td>6000K</td></tr> <tr><td style="border-bottom: 1px solid black;">R</td><td>RED</td></tr> <tr><td style="border-bottom: 1px solid black;">B</td><td>BLUE</td></tr> </table>	25K	2500K	28K	2800K	30K	3000K	35K	3500K	40K	4000K	50K	5000K	60K	6000K	R	RED	B	BLUE
25K	2500K																		
28K	2800K																		
30K	3000K																		
35K	3500K																		
40K	4000K																		
50K	5000K																		
60K	6000K																		
R	RED																		
B	BLUE																		
3 LEAD WIRES	<ul style="list-style-type: none"> - Lead wires at one end. W Lead wires at both ends. 																		

4 LENGTH	See length ordering guide.
-----------------	----------------------------

PRODUCT No.


Standard	"W" Type ¹	CCT
GLSD-25K	GLSD-25KW	2500K
GLSD-28K	GLSD-28KW	2800K
GLSD-30K	GLSD-30KW	3000K
GLSD-35K	GLSD-35KW	3500K
GLSD-40K	GLSD-40KW	4000K
GLSD-50K	GLSD-50KW	5000K
GLSD-60K	GLSD-60KW	6000K
GLSD-R	GLSD-RW	RED
GLSD-B	GLSD-BW	BLUE

※Please contact factory if you request other single color and color temperature.

¹Lead wires at both ends* Type



Beam Angle

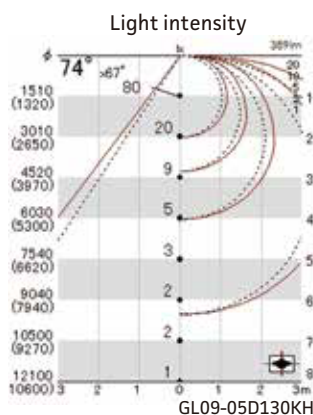

ATEX PRODUCT TECHNOLOGY

1. Unique design structure for horizontal bending
2. Uniform LED brightness by special structure with Copper Wires
3. Patented Silicone rubber case
4. Seamless long flexible printed circuit board technology

PRODUCT SPECIFICATIONS

LEDS	105 /m
LED PITCH	9.5 mm
2500K	440 lm/m
2800K	490 lm/m
3000K	410 lm/m
3500K	450 lm/m
4000K	430 lm/m
5000K	460 lm/m
6000K	430 lm/m
RED	30 lm/m
BLUE	80 lm/m
INPUT	24VDC
WATTS	10 W/m
WIDTH ¹	9 mm
HEIGHT ¹	18 mm
LENGTH ²	76.5 mm ~ 5064 mm
WEIGHT	130 g / m
BEAM ANGLE (2θ 1/2)	160°
TRIM POINTS	every 66.5 mm
Max Unit Connectable	10.1m(5.05m+5.05m)
Bending Radius	60 mm horizontal
Operating Temperature	-10° to 55° C

Power and Control : DMX-512,DALI on / off,and dimming control options. See POWER AND CONTROL data sheets or contact factory for more information.
¹ End cap is 11w x 22h mm. See DRAWINGS.
² See LENGTH ORDER GUIDE.


TSUBAKI SEAMLESS LIGHT MINI TYPE H UPDATE WHITE LEDS

LENGTH ORDER CODE GUIDE (LENGTHS INCLUDE END CAPS.)



MM	MM	MM	MM	MM	MM	MM
76.5	808.0	1539.5	2271.0	3002.5	3734.0	4465.5
143.0	874.5	1606.0	2337.5	3069.0	3800.5	4532.0
209.5	941.0	1672.5	2404.0	3135.5	3867.0	4598.5
276.0	1007.5	1739.0	2470.5	3202.0	3933.5	4665.0
342.5	1074.0	1805.5	2537.0	3268.5	4000.0	4731.5
409.0	1140.5	1872.0	2603.5	3335.0	4066.5	4798.0
475.5	1207.0	1938.5	2670.0	3401.5	4133.0	4864.5
542.0	1273.5	2005.0	2736.5	3468.0	4199.5	4931.0
608.5	1340.0	2071.5	2803.0	3534.5	4266.0	4997.5
675.0	1406.5	2138.0	2869.5	3601.0	4332.5	5064.0
741.5	1473.0	2204.5	2936.0	3667.5	4399.0	

DIMENSIONS

TOP VIEW

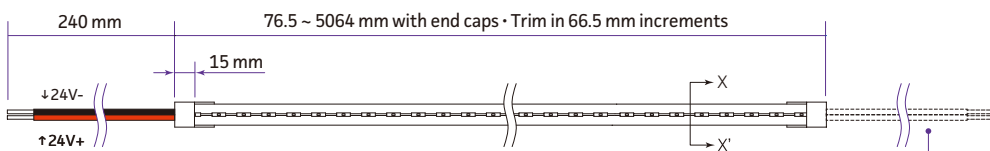

SIDE VIEW

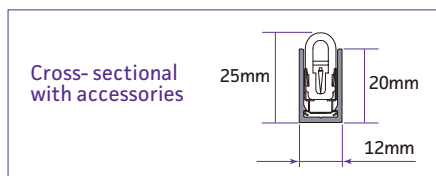

ACCESSORIES¹

ALUMINUM CHANNEL FOR STRAIGHT LINE

FAS00-01GS

Rigid channel for straight line installations.

Weight : 175g
W x H x L : 12 x 22 x 1000 mm



ALUMINUM CHANNEL FOR FLEXIBLE LINE

FAC15-01GS

Flexible channel for curvy line installations.

Weight : 175g
W x H x L : 12 x 22 x 1000 mm



¹ Select one method for installation. These accessories are not used together. See INSTALLATION.