

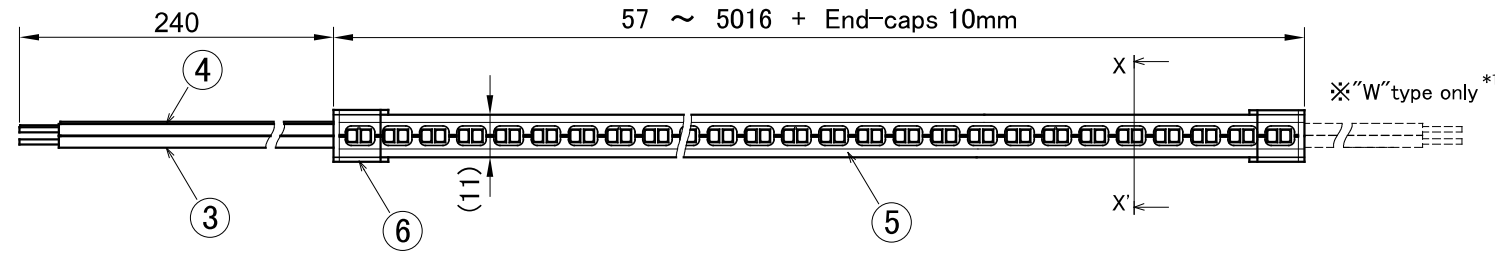





Product Name	Long Silicone Light Duo (Tunable White)	Scale	1:2 (A4)
--------------	--	-------	-----------------

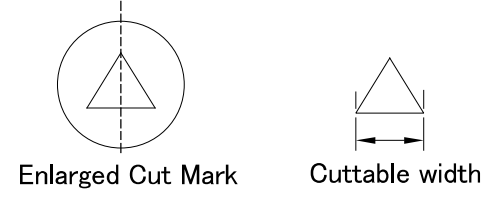

Cable color means below.
 Red cable: V+
 Yellow cable: V- for 2200K
 White cable: V- for 6000K

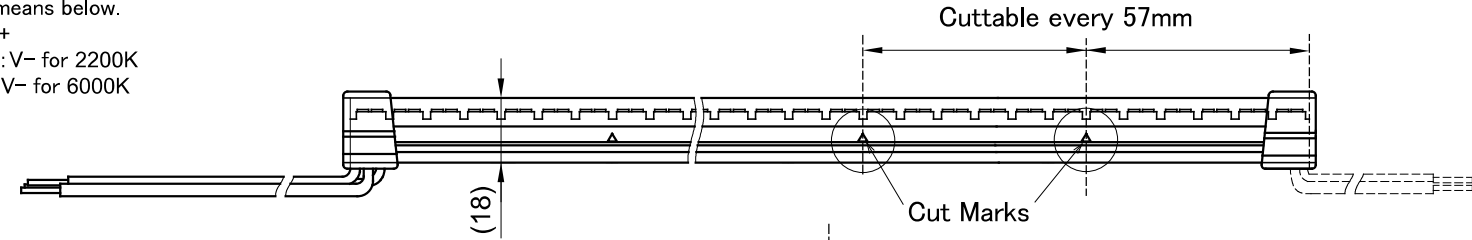

Cross-sectional sizes when installed with FAC20-01GD / FAS00-01GD

Length(m)	~1	~3	~5
Tolerance(mm)	+10 ~ -11	+10 ~ -16	+10 ~ -20

Note:
 When connecting products and power supplies in parallel in multiple systems, make sure that the types and lengths of the wires in each system are the same to prevent differences in brightness and color between the products.

Third-angle projection method (Unit: mm)

Product Specifications		8			
Product No.	GL-TU	7			
Length	57mm ~ 5016mm + End-caps 10mm	6	End cap	Silicone rubber	Translucent
Weight	190g/m	5	Case	Silicone rubber	Translucent
Input Voltage	DC24V	4	Lead wire (V-)	Silicone rubber coating	Yellow, White, AWG20 (0.5 sq)
Power Consumption	Max. 17W/m (2200K only: 9W/m, 6000K only: 8W/m)	3	Lead wire (V+)	Silicone rubber coating	Red, AWG20 (0.5 sq)
Color Temperature	2200K ~ 6000K	2	LED	SMD LED	
Luminous Flux	Max. 1310lm/m (2200K only: 600lm/m, 6000K only: 720lm/m)	1	FPC	Polyimide	
Color Rendering Index (Ra)	84 ~ 89		Parts Name	Material	Note
Beam Angle	120°				
Operating Temperature	-10 ~ 55°C				
Environment	Indoor / Outdoor. IP67 rated.				
Bending Radius	R60 mm horizontal				
Max unit Connectable	5m (5016mm + End-caps)				
Note	*1 "(Standard)" type : Lead wires at one end. "W" type : Lead wires at both ends.	4			
		5			

3D		
Drawn	Reviser	Approved
Shiokawa	Kawasaki	Yamaguchi
2024.6.25	2024.11.1	2024.11.1

Please note that the contents described above may be changed without any advance notice.