


TSUBAKI SEAMLESS LIGHT TYPE H INDOOR

UPDATE

WHITE LEDS /
MONO COLOR LEDS

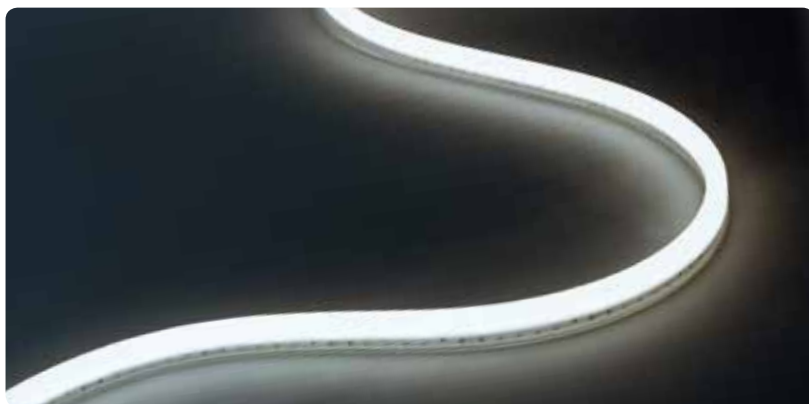

KEY FEATURES AND BENEFITS

- **Side-Bend**
- **9 color variation**
- **Covered by Patented Silicone Rubber Case**
- **Patented Unique Design Structure**
- **LEDs sealed by Silicone**
- **Installation** : See ACCESSORIES for options on straight and flexible mounting channels.
- **Environment** : Interior, dry location use only. Equivalent to IP40 rated.
- **Power and Control** : DMX-512, DALI on/off, and dimming control options. Contact factory for more information.

ORDERING

PRODUCT No.

GMVD	25K	LENGTH 5064.0
1	2	3
PRODUCT	LED COLOR	LENGTH

1	PRODUCT
GMVD	Tsubaki Seamless Light Type H Indoor
2	LED COLOR
22K	2200K
25K	2500K
27K	2700K
30K	3000K
35K	3500K
40K	4000K
50K	5000K
60K	6000K

3	LENGTH
	See length ordering guide.

PRODUCT SPECIFICATIONS

LEDs	105 /m
LED PITCH	9.5 mm
2200K	650 lm/m
2500K	640 lm/m
2700K	820 lm/m
3000K	820 lm/m
3500K	830 lm/m
4000K	820 lm/m
5000K	840 lm/m
6000K	810 lm/m
INPUT	24 VDC
WATTS	8 W/m
WIDTH	11 mm
BEAM ANGLE	215°
TRIM POINTS	Every 66.5 mm
Max Unit Connectable	5 m
Bending Radius	60 mm horizontal
Operating Temperature	-10° to 40°C

PRODUCT No.

Standard	LED COLOR
GMVD-22K	2200K
GMVD-25K	2500K
GMVD-27K	2700K
GMVD-30K	3000K
GMVD-35K	3500K
GMVD-40K	4000K
GMVD-50K	5000K
GMVD-60K	6000K

TSUBAKI SEAMLESS LIGHT TYPE H INDOOR


UPDATE

WHITE LEDS /
MONO COLOR LEDS

LENGTH ORDER CODE GUIDE (LENGTHS INCLUDE END CAPS.)

MM	MM	MM	MM	MM	MM	MM
76.5	808.0	1539.5	2271.0	3002.5	3734.0	4465.5
143.0	874.5	1606.0	2337.5	3069.0	3800.5	4532.0
209.5	941.0	1672.5	2404.0	3135.5	3867.0	4598.5
276.0	1007.5	1739.0	2470.5	3202.0	3933.5	4665.0
342.5	1074.0	1805.5	2537.0	3268.5	4000.0	4731.5
409.0	1140.5	1872.0	2603.5	3335.0	4066.5	4798.0
475.5	1207.0	1938.5	2670.0	3401.5	4133.0	4864.5
542.0	1273.5	2005.0	2736.5	3468.0	4199.5	4931.0
608.5	1340.0	2071.5	2803.0	3534.5	4266.0	4997.5
675.0	1406.5	2138.0	2869.5	3601.0	4332.5	5064.0
741.5	1473.0	2204.5	2936.0	3667.5	4399.0	


DIMENSIONS

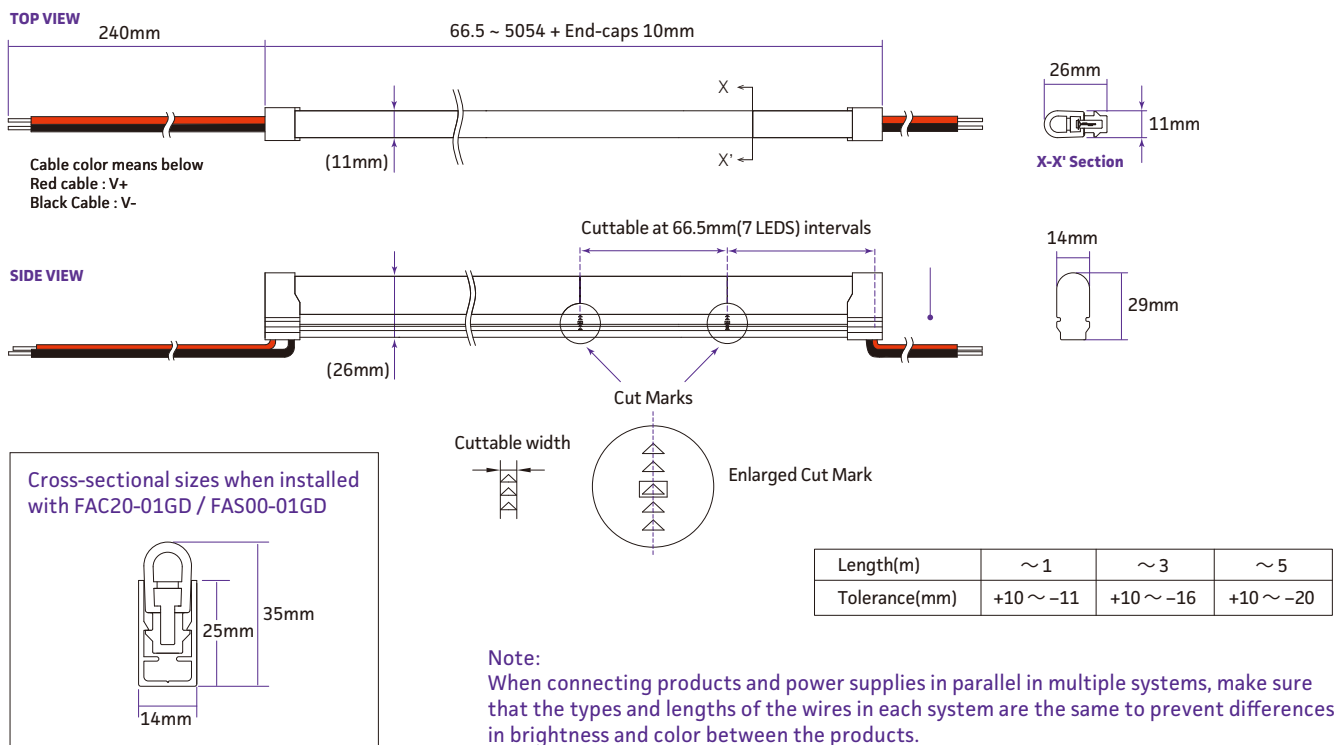

ACCESSORIES¹


ALUMINUM CHANNEL FOR STRAIGHT LINE

- ☐ **FAS00-01GD**
Rigid channel for straight line installations.
Weight : 200g
W x H x L : 14 x 25 x 1000 mm



ALUMINUM CHANNEL FOR FLEXIBLE LINE

- ☐ **FAC20-01GD**
Flexible channel for curvy line installations.
Weight : 180g
W x H x L : 14 x 25 x 1000 mm



¹ Select one method for installation. These accessories are not used together. See INSTALLATION.