


SHEET LIGHT DUO DMX (Tunable White) NEW

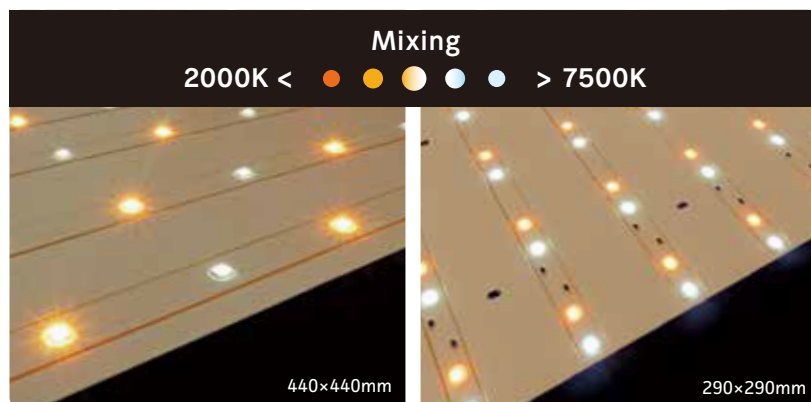

ORDERING

PRODUCT No.

SHL - TU	DMX
1 PRODUCT	2 DIMENSIONS

1	PRODUCT
	SHL-TU DMX Sheet Light Duo DMX (Tunable White)

2	DIMENSIONS
440SQ Standard Dimensions	
44	440 × 440 × 1.8 mm
Customized Dimensions	
4428	440 × 280 × 1.8 mm
4413	440 × 136 × 1.8 mm
2244	220 × 440 × 1.8 mm
2228	220 × 280 × 1.8 mm
2213	220 × 136 × 1.8 mm
290SQ Standard Dimensions	
29	290 × 290 × 1.8 mm

PRODUCT No.

PRODUCT No.	WATTS	LEDS
440SQ		
SHL-TU-44DMX	12W	144LEDS in 12 rows of 12
YSHL-TU-4428DMX	8W	96LEDS in 8 rows of 12
YSHL-TU-4413DMX	4W	48LEDS in 4 rows of 12
YSHL-TU-2244DMX	6W	72LEDS in 12 rows of 6
YSHL-TU-2228DMX	4W	48LEDS in 8 rows of 6
YSHL-TU-2213DMX	2W	24LEDS in 4 rows of 6
290SQ		
SHL-TU-29	6W	72LEDS in 6 rows of 12

KEY FEATURES AND BENEFITS

- **Flexible board lighting.**
- **Sheet Light with DMX driver (1 peace 1 driver)**
- **Optimum for Indirect Light Box**
- **Clear type**
- **Adjustable CCT range : 2000K-7500K**
- **Cutttable :** We can prepare the customized dimensions.
- **Construction :** 1mm thick aluminum board and laminated film
- **Installation :** Screw hold fixtures in place.
- **Environment :** IP67 rated. Water and dust resistant.
Proper drainage required. Do not use in an area where water is contin usually splashed on the product. Not for use as a submersible light source.
- **Power and Control :** DMX-512, DALI, on/off, and dimming control options.


PRODUCT SPECIFICATIONS

	440SQ	290SQ
LED¹	144 /pc	72 /pc
LED PITCH	38 mm	15 mm / 35 mm
2000K	570 lm/pc	290 lm/pc
7500K	760 lm/pc	390 lm/pc
Max. Lumens	1330 lm/pc	680 lm/pc
INPUT	24 VDC	
WATTS	Max. 12W/pc 2000K : 6W 7500K : 6W	Max. 6W/m 2000K : 3W 7500K : 3W
DIMENSIONS¹	440×440×1.5 mm	290×290×1.5 mm
WEIGHT¹	360 g	160 g
Connection Type	DMX : JST JWPFF connector DC Input : KEL FW connector	
BEAM ANGLE	115°	
Max Unit Connectable	8 pcs	16 pcs
Bending Radius	300 mm	
Light Diffusion distance	Min. 60 mm	
Operating Temperature	-10°C to 55°C	
Control	DMX512	
Used DMX channels	2 chs / pc	
Max Run on Single DMX Universe	256 pcs	

¹ They are for Standard Dimmensions of 440×440×1.5mm or 290×290×1.5mm
Please refer to "Product No." about Customized Dimensions

SHEET LIGHT DUO DMX (Tunable White) NEW

DIMENSIONS

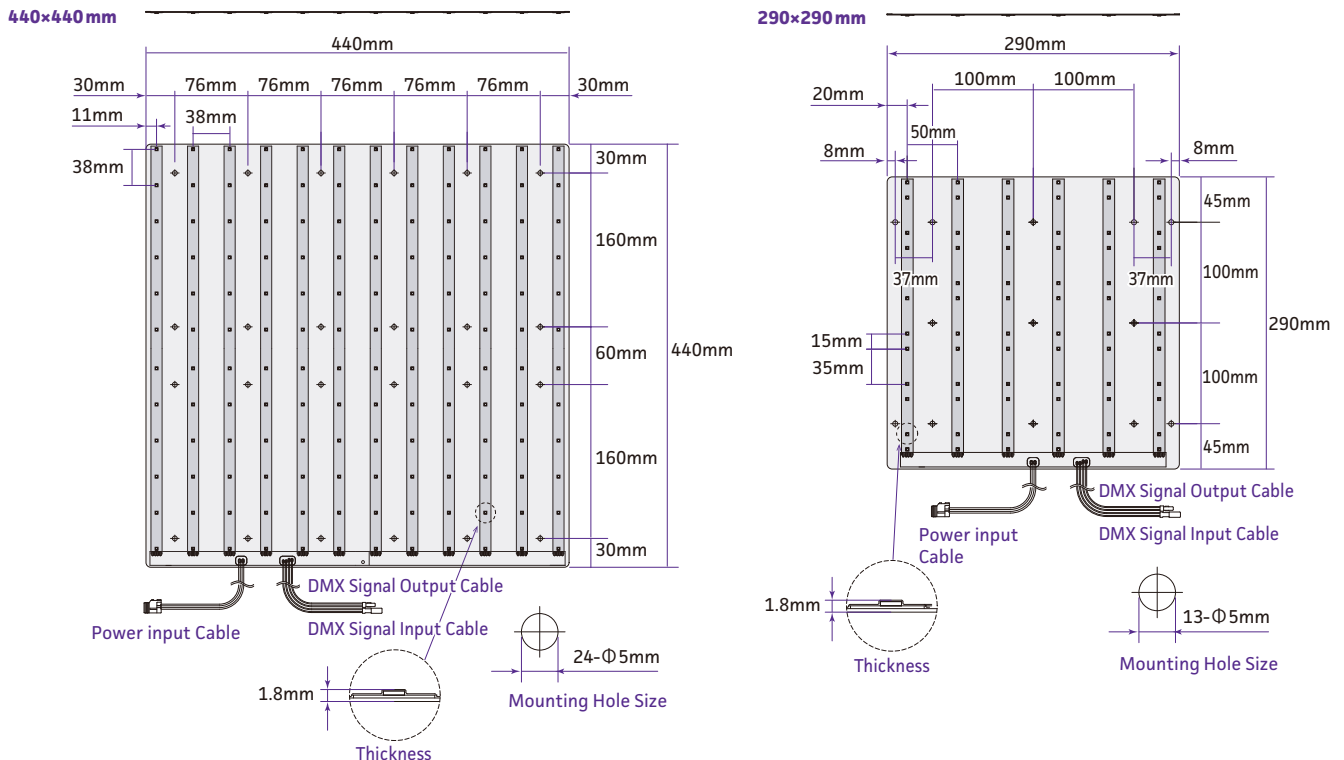

CONNECTORS

DC CABLE

☐ WCSHL-2PC

Power cable (2Pin)
L = 240mm, Ip67



☐ WCSHL-2RC

Power Relay cable (2Pin)
L = 350mm, Ip67



☐ WCSHL-2TC

Power Terminal cable (2Pin)
L = 350mm, Ip67



☐ CTK2

Multi point Connector
(2Pin), Ip67



DMX CABLE

☐ WCADR-XLR3C

DMX Input
Cable for
XLR3 3pin
Male XLR
Connector



Standard Length : 1000mm

☐ WCADR-XLR5C

DMX Input
Cable for
XLR5 5pin
Male XLR
Connector



Standard Length : 1000mm

☐ WCADR-RJ45C

DMX Input
Cable for
RJ45 RJ45C
Connector



Standard Length : 1000mm

☐ WCADR-DMXRC

DMX Relay
Cable



Standard Length : 1000mm

ACCESSORIES

ALUMINUM RAIL

☐ FAS00-04SHL

Including Self
Tapping Screws
6pcs
L = 890mm

