


SHEET LIGHT DUO (Tunable White) NEW

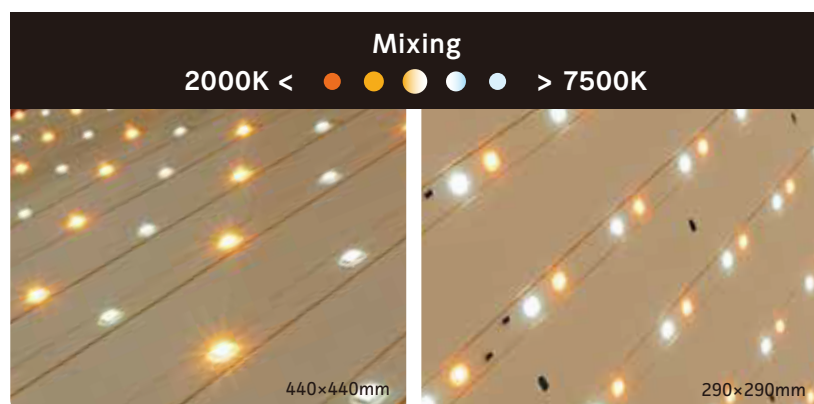

ORDERING

PRODUCT No.

SHL - TU	44
1	2
PRODUCT	DIMENSIONS

1	PRODUCT
	SHL-TU Sheet Light Duo

2	DIMENSIONS
440SQ Standard Dimensions	
44	440 × 440 × 1.8 mm
Customized Dimensions	
4428	440 × 288 × 1.8 mm
4413	440 × 136 × 1.8 mm
2244	220 × 440 × 1.8 mm
2228	220 × 288 × 1.8 mm
2213	220 × 136 × 1.8 mm
290SQ Standard Dimensions	
29	290 × 290 × 1.8 mm

PRODUCT No.

PRODUCT No.	WATTS	LEDS
440SQ		
SHL-TU-44	12W	144LEDS in 12 rows of 12
YSHL-TU-4428	8W	96LEDS in 8 rows of 12
YSHL-TU-4413	4W	48LEDS in 4 rows of 12
YSHL-TU-2244	6W	72LEDS in 12 rows of 6
YSHL-TU-2228	4W	48LEDS in 8 rows of 6
YSHL-TU-2213	2W	24LEDS in 4 rows of 6
290SQ		
SHL-TU-29	6W	72LEDS in 6 rows of 12

KEY FEATURES AND BENEFITS

- **Flexible board lighting.**
- **Optimum for Indirect Light Box**
- **Clear type**
- **Adjustable CCT range : 2000K-7500K**
- **Cutttable** : We can prepare the customized dimmensions.
- **Construction** : 1mm thick aluminum board and laminated film
- **Installation** : Screw hold fixtures in place.
- **Environment** : IP67 rated. Water and dust resistant.
Proper drainage required. Do not use in an area where water is contin usually splashed on the product. Not for use as a submersible light source.
- **Power and Control** : DMX-512, DALI, on/off, and dimming control options.

PRODUCT SPECIFICATIONS


	440SQ	290SQ
LED¹	144 /pc	72 /pc
LED PITCH	38 mm	15 mm / 35 mm
2000K	570 lm/pc	280 lm/pc
7500K	770 lm/pc	380 lm/pc
Max. Lumens	1340 lm/pc	660 lm/pc
INPUT	24 VDC	
WATTS	Max. 12W/pc 2000K : 6W 7500K : 6W	Max. 6W/m 2000K : 3W 7500K : 3W
DIMENSIONS¹	440×440×1.5 mm	290×290×1.5 mm
WEIGHT¹	360 g	160 g
BEAM ANGLE	115°	
Max Unit Connectable	8 pcs	16 pcs
Bending Radius	300 mm	
Light Diffusion distance	Min. 60 mm	
Operating Temperature	-10°C to 55°C	

¹They are for Standard Dimmensions of 440×440×1.5mm or 290×290×1.5mm
Please refer to "Product No." about Customized Dimensions


SHEET LIGHT DUO (Tunable White) NEW

DIMENSIONS

440×440 mm

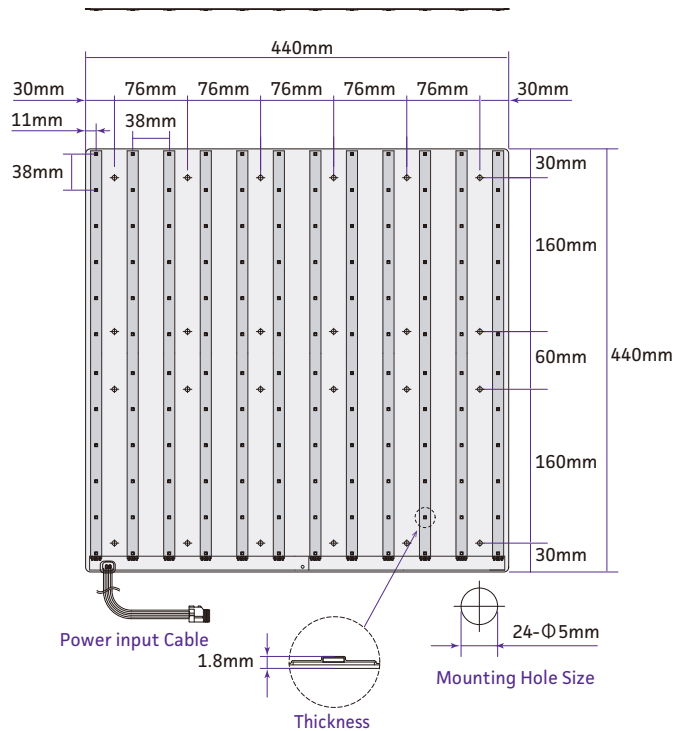

290×290 mm

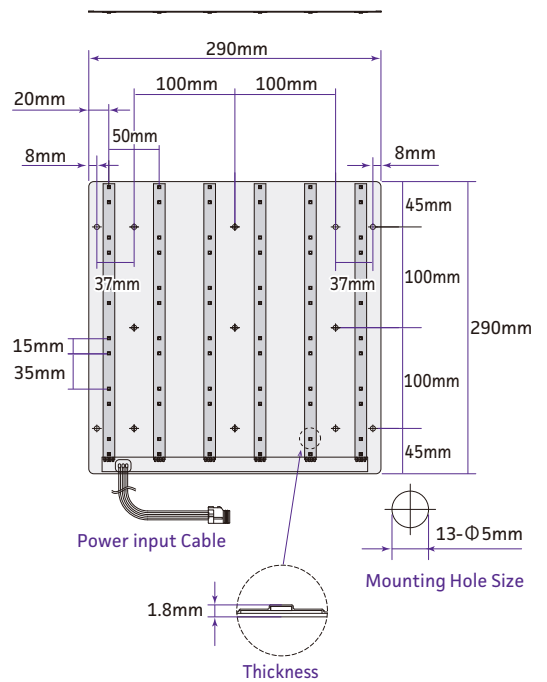

CONNECTORS

WCSHL-3PC

Power cable (3Pin)
L = 240mm, Ip67



WCSHL-3RC

Power Relay cable (3Pin)
L = 350mm, Ip67



WCSHL-3TC

Power Terminal cable (3Pin)
L = 350mm, Ip67



CTK3

Multi point Connector
(3Pin), Ip67



ACCESSORIES

ALUMINUM RAIL

FAS00-04SHL

Including Self Tapping Screws 6pcs

L = 890mm

