

SLIT LIGHT

WHITE LEDS



KEY FEATURES AND BENEFITS

- **Dotless Compact design light with 8.6 mm width**
- **Customizable 45 different lengths**
- **Various Connectors for Easy Installation**
- **Only 8.6mm Width**
- **Optimum item for Direct Slim line with high power**
- **Dimmable with DMX / DALI**
- **Construction** : Aluminum housing with integrated polycarbonate matte lens
- **Installation** : Screw mounted brackets hold fixtures in place. See INSTALLATION.
- **Environment** : Interior, dry location use only.
- **Power and Control** : DMX-512, DALI, on/off, and dimming control options. See POWER AND CONTROL data sheets or contact factory for more information.

ORDERING

PRODUCT No.				
SL	27	-	DF 2	LX
1	2		3	4
PRODUCT	LED COLOR		CONNECTION	LENGTH
				1810

1	PRODUCT	4	LENGTH
	ST Slit Light		See length ordering guide Standard is 1010 mm .
2	LED COLOR		
	27 2700K	35 3500K	50 5000K
	30 3000K	40 4000K	
3	CONNECTION		
	LX Hard Wire tails *Only One End Wires		
	LL Both Ends Hard Wire tails *Both Ends Wires		



PRODUCT SPECIFICATIONS

LED	175/m
LED PITCH	5.7 mm
2700K	430 lm/m
3000K	440 lm/m
3500K	560 lm/m
4000K	480 lm/m
5000K	560 lm/m
INPUT	24VDC
WATTS	12 W/m
WIDTH¹	8.6 mm (*11 mm)
HEIGHT	15 mm
LENGTH²	50 mm ~ 1810 mm
WEIGHT	150g (5.3 oz) per meter
BEAM ANGLE	110°
TRIM POINTS	Every 40 mm
Max Unit Connectable	1810 mm
Operating Temperature	-10° to 35°C

¹ With mounting bracket
² Standard. See LENGTH ORDER GUIDE.

PRODUCT No.			
PRODUCT NO.	LED COLOR	PRODUCT NO.	LED COLOR
SL27-DF2LX	2700K	SL27-DF2LL	2700K
SL30-DF2LX	3000K	SL30-DF2LL	3000K
SL35-DF2LX	3500K	SL35-DF2LL	3500K
SL40-DF2LX	4000K	SL40-DF2LL	4000K
SL50-DF2LX	5000K	SL50-DF2LL	5000K


LENGTH ORDER CODE GUIDE

ALL MODELS

MM	MM	MM	MM	MM
50	410	770	1130	1490
90	450	810	1170	1530
130	490	850	1210	1570
170	530	890	1250	1610
210	570	930	1290	1650
250	610	970	1330	1690
290	650	1010	1370	1730
330	690	1050	1410	1770
370	730	1090	1450	1810

DIMENSIONS

[LX:Hard wire tails]

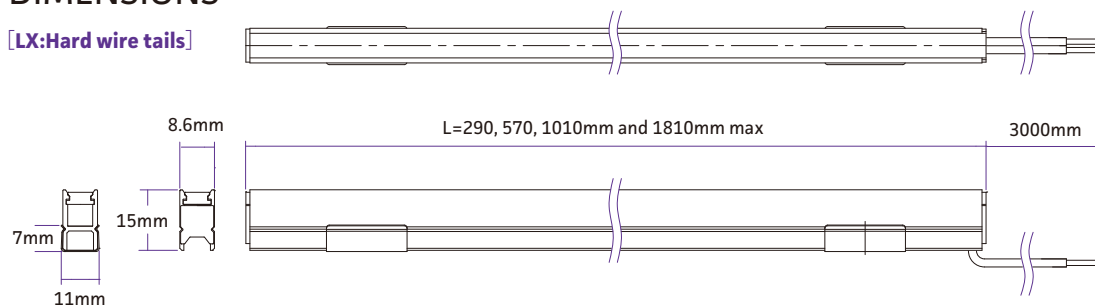

ACCESSORIES

MOUNTING BRACKET

- ☒ **EP506-01**
SUS mounting brackets. Two (2) included with each fixture. Secures to surfaces with screws (provided by others). Fixture slides or snaps into brackets. See INSTALLATION.

