


Product Name	Slit Light (Made to Order)	SL□□-DF※※	Scale	1 : 2 (A4)
--------------	-----------------------------------	------------------	-------	-------------------

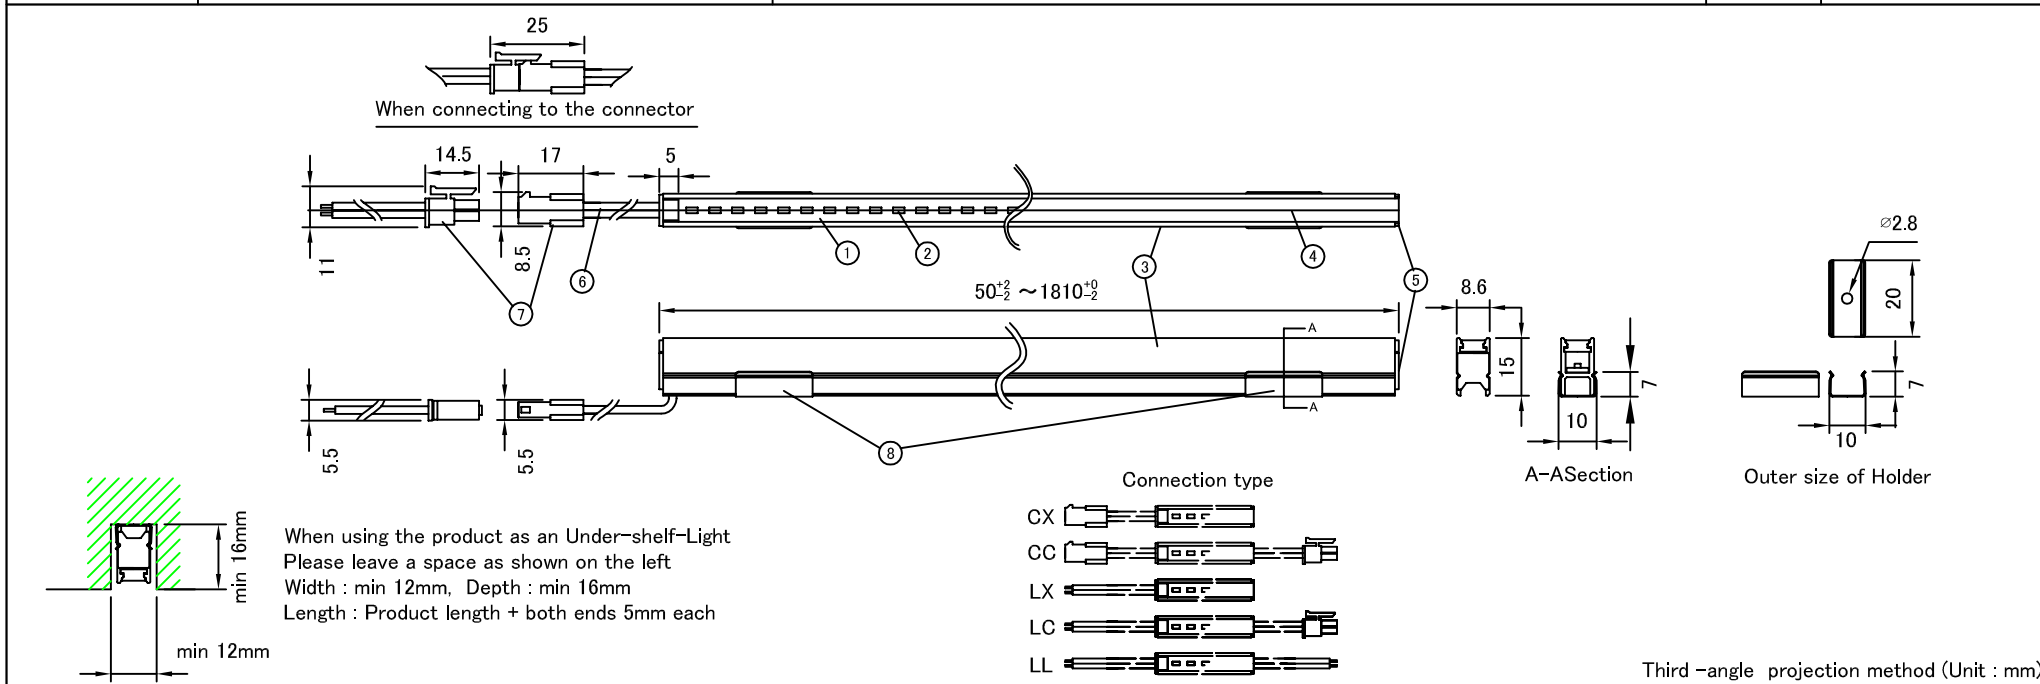

Product Specifications			9		3D				
Product No.	SL□□-DF※※	□□: LED Color, ※※: Connection type	8	Holder	SUS				
Length	50mm ~ 1810mm (variable in length by increments of 40mm)		7	Connector					
Weight	150g/m		6	Lead wire (VFF0.3)	V+ : Black with a white line V- : Black				
Input Voltage	DC24V		5	End Cap	Polycarbonate(white)				
Power Consumption	12W/m		4	Top Cover	Polycarbonate(Translucent white)				
Color Temperature	22:2200K, 25:2500K, 27:2700K, 30:3000K, 35:3500K, 40:4000K, 50:5000K		3	Body	Aluminum				
Luminous Flux	430 lm/m ~ 560 lm/m		2	LED	SMD LED				
Beam Angle	110°		1	PCB					
Operating Temperature	-10 ~ 35°C		Parts List		Note				
Environment	Interior, dry location use only		Accessories						
Max units connectable	1810mm		1			Design	Reviser	Drawing Check	Approval
Connection	"CX" type : Connection type	"CC" type : Both Ends Connection type	2			Etou	Etou	Yamaguchi	Kimori
	"LX" type : Hard wire tails	"LL" type : Both Ends Hard wire tails	3			Jan14 '15	May 28 '20	May 28 '20	May 28 '20
	"LC" type : Hard wire and Connector type		4						

Please note that content described above may be changed without any advance notice.