


## Length of the Products and Wires

<b>Product</b>	<b>TL08(2500K~5000K)</b>
----------------	--------------------------

Power consumption: 28W/m  
Maximum series connectios length 5m

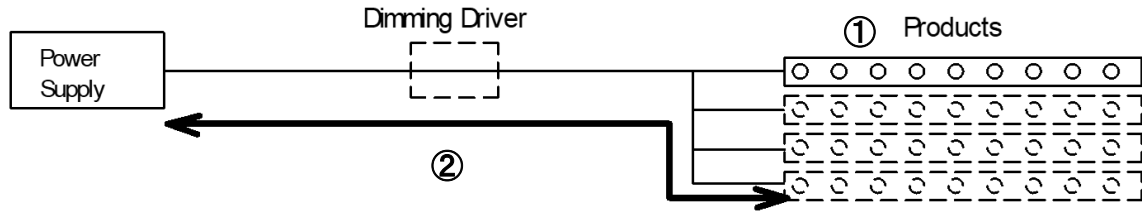

### ①Connectable Total Length of the Products. (When use HLG power supply)

- Please use the power supply at 70% output, for the long tern reliability.
- If total length of the products exceed "Maximum series connectios length", connect them in parallel.

Power supply	Rated output	Recommended output	Connectable Length
HLG-60H-24	60.0 W	42.0 W	1.5 m
HLG-100H-24	96.0 W	67.0 W	2.4 m
HLG-150H-24	150.0 W	105.0 W	3.8 m
HLG-240H-24	240.0 W	168.0 W	6.0 m
HLG-320H-24	320.0 W	224.0 W	8.0 m
-	-	-	-
-	-	-	-

### ②Recommended longest wire length

The maximum wiring length from power supply to light fixture (via dimming driver) is recommended as follows:

- When parallele connecting, each wiring lengths should be less than the maximum recommended wiring length, and even as possil
- "Total Product Length" in the table below is the total length of products, including parallel and series connections.
- When long lamps is necessary, divide them in parallel not to exceed "maximum series connection length".
- Use a power supply that have "Recommende output" that is greater than "Total power consumption".


Cable Cores: 2C		VCTF/Twisted wire (mm <sup>2</sup> )			VVF/Single Wire (φmm)		
Total Product	Total Power consumption	0.75sq/2C	1.25sq/2C	2sq/2C	1.6mm/2C	2mm/2C	2.6mm/2C
0.5 m	14.0 W	18 m	30 m	48 m	48 m	76 m	128 m
1.0 m	28.0 W	9 m	15 m	24 m	24 m	38 m	64 m
1.5 m	42.0 W	6 m	10 m	16 m	16 m	25 m	43 m
2.0 m	56.0 W	5 m	8 m	12 m	12 m	19 m	32 m
2.5 m	70.0 W	4 m	6 m	10 m	10 m	15 m	26 m
3.0 m	84.0 W	3 m	5 m	8 m	8 m	13 m	21 m
3.5 m	98.0 W	3 m	4 m	7 m	7 m	11 m	18 m
4.0 m	112.0 W	2 m	4 m	6 m	6 m	9 m	16 m
4.5 m	126.0 W	2 m	3 m	5 m	5 m	8 m	14 m
5.0 m	140.0 W	2 m	3 m	5 m	5 m	8 m	13 m
5.5 m	154.0 W	2 m	3 m	4 m	4 m	7 m	12 m
6.0 m	168.0 W	2 m	3 m	4 m	4 m	6 m	11 m
6.5 m	182.0 W	1 m	2 m	4 m	4 m	6 m	10 m
7.0 m	196.0 W	1 m	2 m	3 m	3 m	5 m	9 m
7.5 m	210.0 W	1 m	2 m	3 m	3 m	5 m	9 m
8.0 m	224.0 W	1 m	2 m	3 m	3 m	5 m	8 m
8.5 m	238.0 W	-	-	-	-	-	-
9.0 m	252.0 W	-	-	-	-	-	-
9.5 m	266.0 W	-	-	-	-	-	-
10.0 m	280.0 W	-	-	-	-	-	-

Above are approximate values.

## Length of the Products and Wires

<b>Product</b>	<b>TL08(2200K)</b>
----------------	--------------------

Power consumption: 20W/m  
Maximum series connectios length 5m

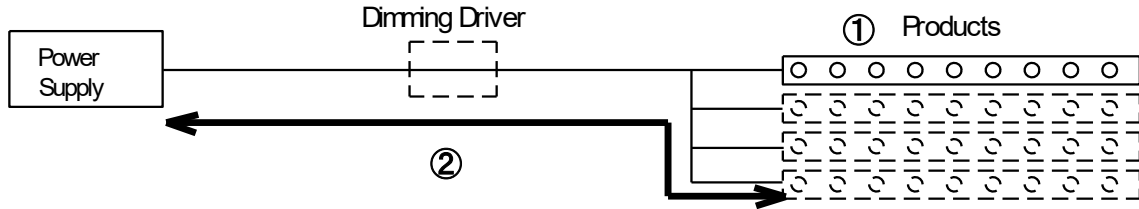

### ①Connectable Total Length of the Products. (When use HLG power supply)

- Please use the power supply at 70% output, for the long tern reliability.
- If total length of the products exceed "Maximum series connectios length", connect them in parallel.

Power supply	Rated output	Recommended output	Connectable Length
HLG-60H-24	60.0 W	42.0 W	2.1 m
HLG-100H-24	96.0 W	67.0 W	3.4 m
HLG-150H-24	150.0 W	105.0 W	5.3 m
HLG-240H-24	240.0 W	168.0 W	8.4 m
HLG-320H-24	320.0 W	224.0 W	11.2 m
-	-	-	-
-	-	-	-

### ②Recommended longest wire length

The maximum wiring length from power supply to light fixture (via dimming driver) is recommended as follows:

- When paralle connecting, each wiring lengths should be less than the maximum recommended wiring length, and even as poss
- "Total Product Length" in the table below is the total length of products, including parallel and series connections.
- When long lamps is necessary, divide them in parallel not to exceed "maximum series connection length".
- Use a power supply that have "Recommendde output" that is greater than "Total power consumption".

Cable Cores: 2C		VCTF/Twisted wire (mm <sup>2</sup> )			VVF/Single Wire (φmm)		
Product Length	Power consumption	0.75sq/2C	1.25sq/2C	2sq/2C	1.6mm/2C	2mm/2C	2.6mm/2C
0.5 m	10.0 W	25 m	42 m	67 m	68 m	106 m	179 m
1.0 m	20.0 W	13 m	21 m	34 m	34 m	53 m	89 m
1.5 m	30.0 W	8 m	14 m	22 m	23 m	35 m	60 m
2.0 m	40.0 W	6 m	11 m	17 m	17 m	26 m	45 m
2.5 m	50.0 W	5 m	8 m	13 m	14 m	21 m	36 m
3.0 m	60.0 W	4 m	7 m	11 m	11 m	18 m	30 m
3.5 m	70.0 W	4 m	6 m	10 m	10 m	15 m	26 m
4.0 m	80.0 W	3 m	5 m	8 m	8 m	13 m	22 m
4.5 m	90.0 W	3 m	5 m	7 m	8 m	12 m	20 m
5.0 m	100.0 W	3 m	4 m	7 m	7 m	11 m	18 m
5.5 m	110.0 W	2 m	4 m	6 m	6 m	10 m	16 m
6.0 m	120.0 W	2 m	4 m	6 m	6 m	9 m	15 m
6.5 m	130.0 W	2 m	3 m	5 m	5 m	8 m	14 m
7.0 m	140.0 W	2 m	3 m	5 m	5 m	8 m	13 m
7.5 m	150.0 W	2 m	3 m	4 m	5 m	7 m	12 m
8.0 m	160.0 W	2 m	3 m	4 m	4 m	7 m	11 m
8.5 m	170.0 W	1 m	2 m	4 m	4 m	6 m	11 m
9.0 m	180.0 W	1 m	2 m	4 m	4 m	6 m	10 m
9.5 m	190.0 W	1 m	2 m	4 m	4 m	6 m	9 m
10.0 m	200.0 W	1 m	2 m	3 m	3 m	5 m	9 m

Above are approximate values.