
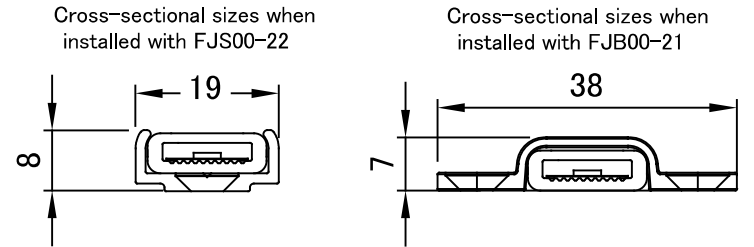


Product Name	Tape Light (TL09 / 9.5 mm pitch)	Scale	1:2 (A4)
--------------	---	-------	----------

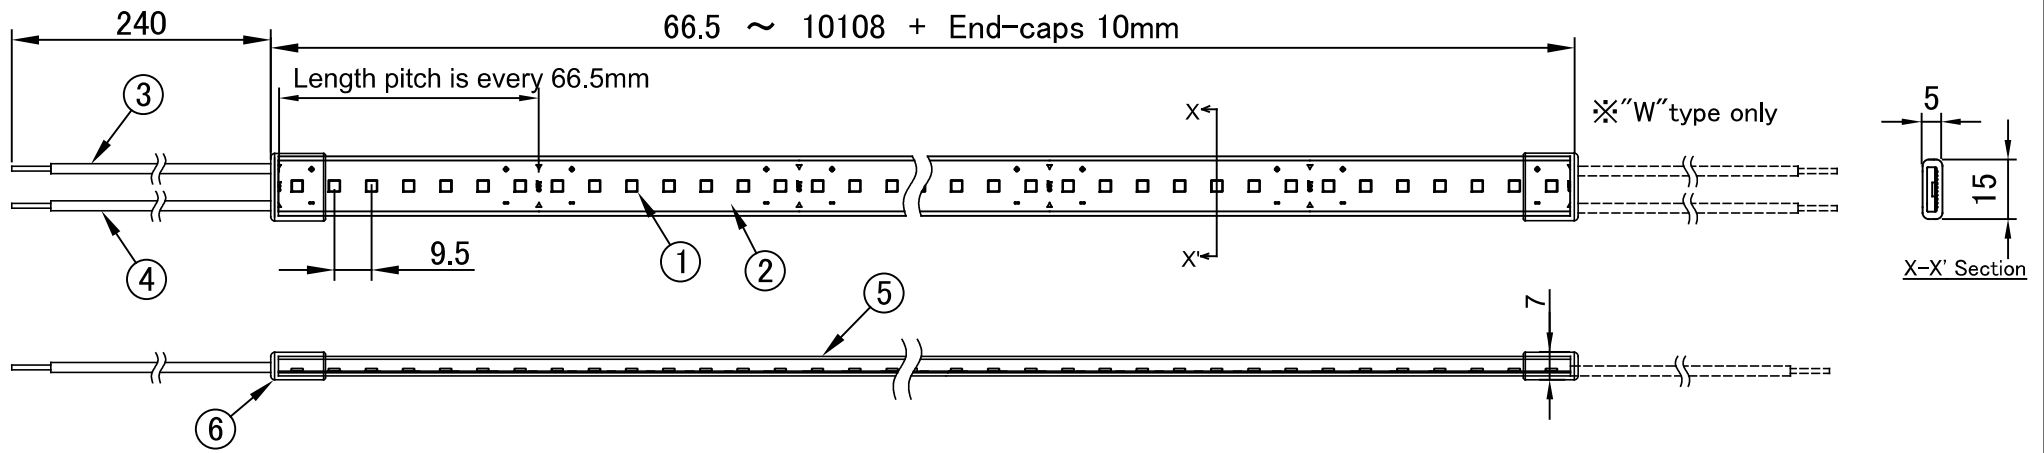

Length(m)	~1	~3	~5	~7	~10
Tolerance(mm)	+10 ~ -11	+10 ~ -15	+10 ~ -19	+10 ~ -24	+10 ~ -30

Product Specifications									
Product No.	TL09-090A□□□ ("W" type: TL09-090A□□□KW)								
Length	66.5mm ~ 10108mm + End-caps 10mm								
Weight	130g/m								
Input Voltage	DC24V								
Power Consumption	11W/m (2200K: 9W/m Red: 8W/m)								
Color Temperature	2200K	2500K	2800K	3000K	3500K	4000K	5000K	RX (Red)	BX (Blue)
Luminous Flux	830 lm/m	980lm/m	1070lm/m	1080lm/m	1270lm/m	1350lm/m	1320lm/m	300lm/m	210lm/m
Beam Angle	115°								
operating Temperature	-10 ~ 55°C								
Environment	Indoor / Outdoor (IP67 rated)								
Bending Radius	30mm vertical								
Max Unit Connectable	10.1m (10108mm + End-caps)								
Note	"(Standard)" type : Lead wires at one end. "W" type : Lead wires at both ends. "□□" means the first two digits of the colour temperature of the product.								

Parts Name	Material	Note
Parts List		
Accessories (Option)		
1	Polycarbonate Rigid Channel (Length=1000mm for straight line installation) : FJS00-22	
2	Polycarbonate Mounting Bracket (Use 5pcs per mater) : FJB00-21	
3		
4		
5		

3D		
Drawn	Reviser	Approved
Hashimoto	Nakashima	Yamaguchi
2019.9.4	2024.4.5	2024.4.5

Please note that content described above may be changed without any advance notice