


Product Name	Tape Light RGB	TL10AM	Scale	1 : 2 (A4)
--------------	-----------------------	---------------	-------	-------------------

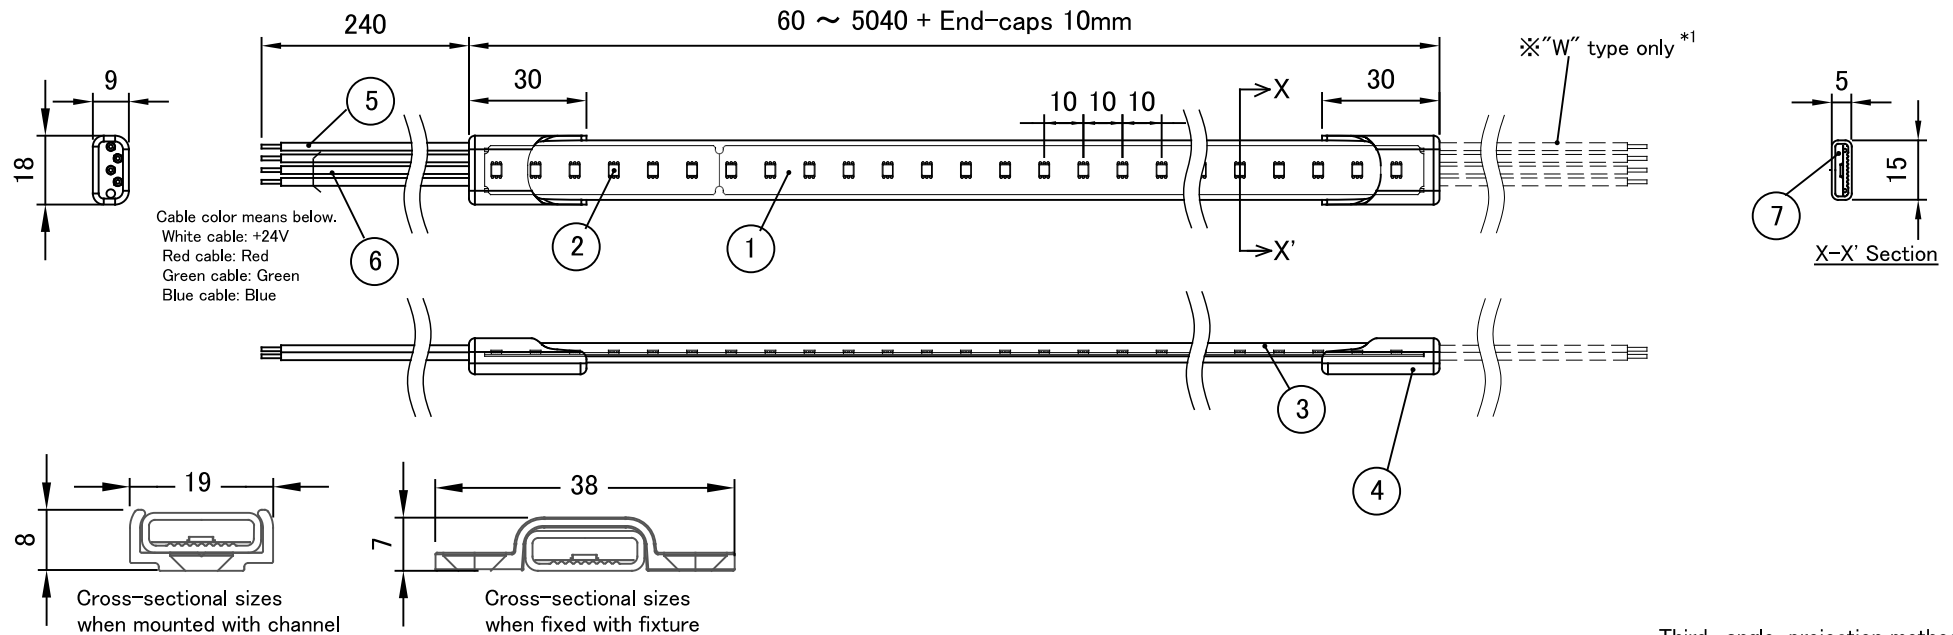

Third-angle projection method (Unit : mm)

Product Specifications				10		3D					
Product No.	TL10-090AM (“W” type: TL10-090AMW) *1			9							
Length	60mm ~ 5040mm + End-caps 10mm *2			8							
Cutting points	60mm (6 LED) *Customized length order available			7	Insert					Silicone	
Weight	115g/m			6	Lead wire (V-)					Silicone rubber coating / RGB	
Input Voltage	DC24V ±1%	Power Consumption	10W/m (Red: 4.5 / Green: 3.1 / Blue: 2.3 W/m)	5	Lead wire (V+)					Silicone rubber coating / +24V	
LED Color	Red, Green, Blue and mixed colors			4	End Cap					Silicone rubber	
Luminous Flux	Red: 140 lm/m, Green: 270 lm/m, Blue: 60 lm/m			3	Case					Silicone rubber	
Beam Angle	115°			2	Color LED					SMD LED	
Operating Temperature	-10 ~ 55°C			1	FPC						
Environment	IP67 rated. Water and dust resistant. Product should not reside in standing water.			Parts List						Note	
Bending Radius	R30mm vertical			Accessories (Option)							
Max Unit connectable	10.1m (5040mm × 2 + End-caps)			1	Polycarbonate Channel FJS00-22	※Length=1000mm for straight line installations.		Design	Reviser	Drawing Check	Approval
Note	*1 “(Standard)” type : Lead wires at one end. “W” type : Lead wires at both ends.			2	Polycarbonate Bracket FJB00-21	※5 pieces per meter for flexible line installations.		Yamaguchi	Yanase	Yamaguchi	Yamaguchi
	*2 5100mm~10080mm : Can be available as custom order.			3				2016.8.29	2022.5.20	2022.5.20	2022.5.20
				4							

Please note that content described above may be changed without any advance notice.

Atex Co., Ltd.

Ver 220520