
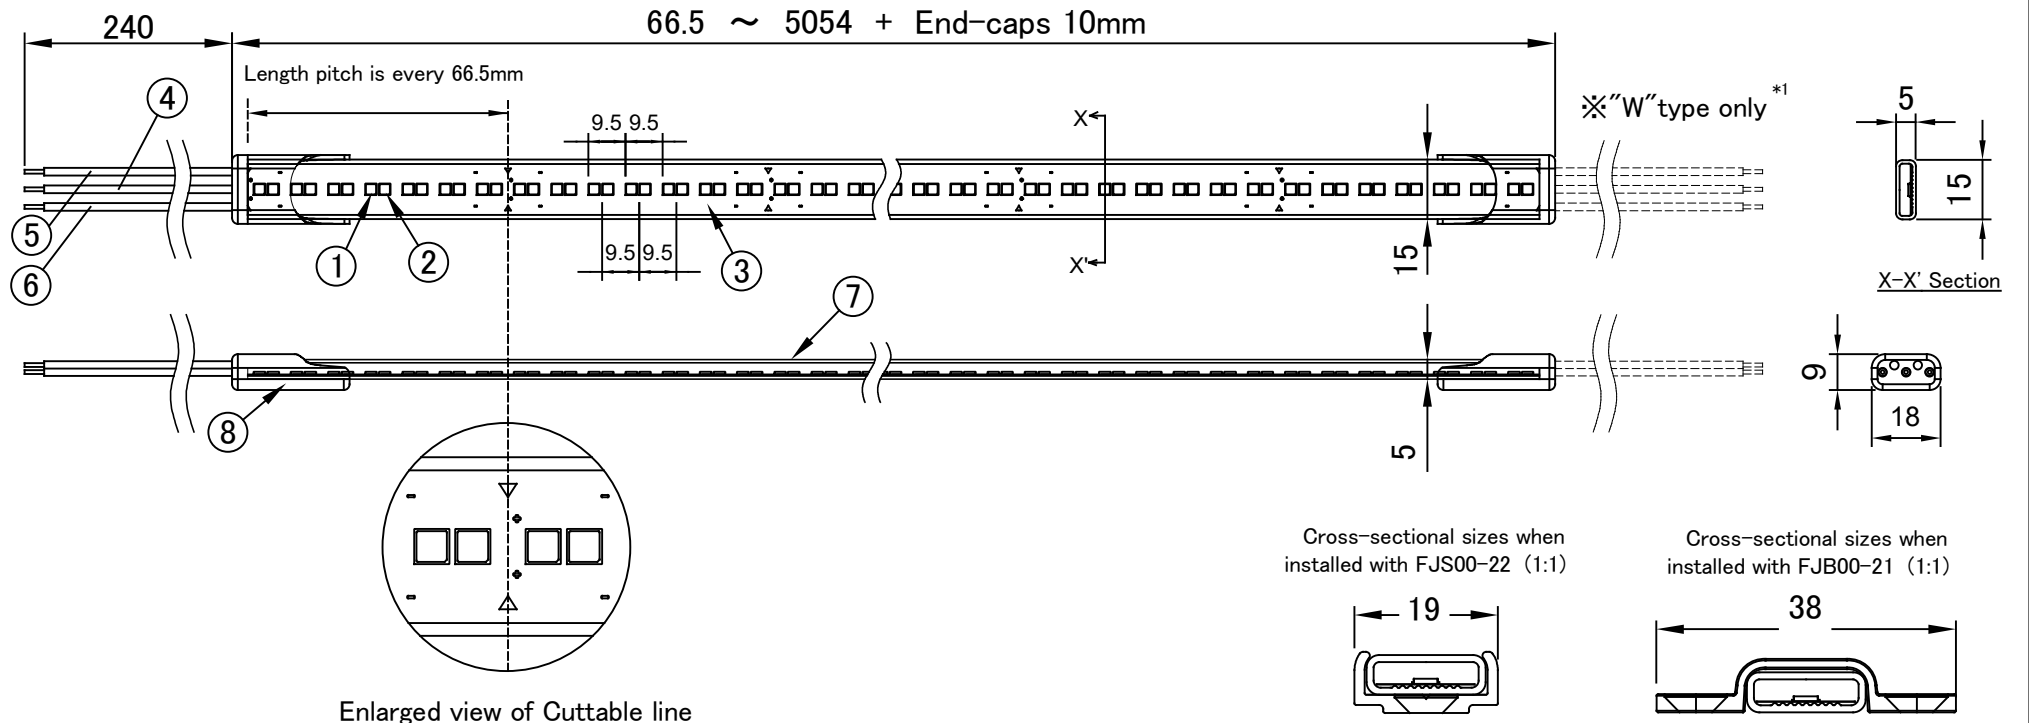


Product Name	Tape Light Duo (Tunable White)	Scale	1:2 (A4)
--------------	---------------------------------------	-------	-----------------

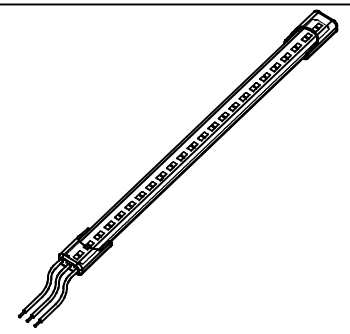

Third-angle projection method (Unit : mm)

Product Specifications		8	End Cap	Silicone rubber	Clear	3D 	
Product No.	TL-TU ("W" type:TL-TUW) *1	7	Case	Silicone rubber	Clear		
Length	66.5mm ~ 5054mm + End-caps 10mm	6	Lead Wire (V-) for 2200K	Silicone rubber coating	Yellow, 0.5sq		
Weight	130g/m	5	Lead Wire (V-) for 6000K	Silicone rubber coating	White, 0.5sq		
Input Voltage	DC24V	4	Lead Wire (V+)	Silicone rubber coating	Red, 0.5sq		
Power Consumption	Max.17W/m (2200K only:9W/m, 6000K only:8W/m)	3	FPC	Polyimide	Flexible Printed Circuits		
Color Temperature	2200K ~ 6000K	2	LED for 6000K	SMD LED			
Luminous Flux	Max.1950lm/m (2200K only:920lm/m, 6000K only:1030lm/m)	1	LED for 2200K	SMD LED			
Beam Angle	115°		Parts Name	Material	Note		
Operating Temperature	-10 ~ 55°C		Accessories (Option)				
Environment	Indoor / Outdoor (IP67 rated)		1	Polycarbonate Rigid Channel (Length=1000mm for straight line installations) : FJS00-22			
Bending Radius	60mm vertical		2	Polycarbonate Mounting Bracket (Use 5pcs per mater) : FJB00-21			
Max Unit Connectable	5m (5054mm + End-caps)				Drawn	Reviser	Approved
Note	*1 "(Standard)" type : Lead wires at one end. "W" type : Lead wires at both ends.	3			Yamaguchi	Shiokawa	Yamaguchi
		4			2022.1.21	2022.5.20	2022.5.20
		5					