


Product Name	Tape Light Duo (Tunable White)	Scale	1:2 (A4)
--------------	---------------------------------------	-------	----------

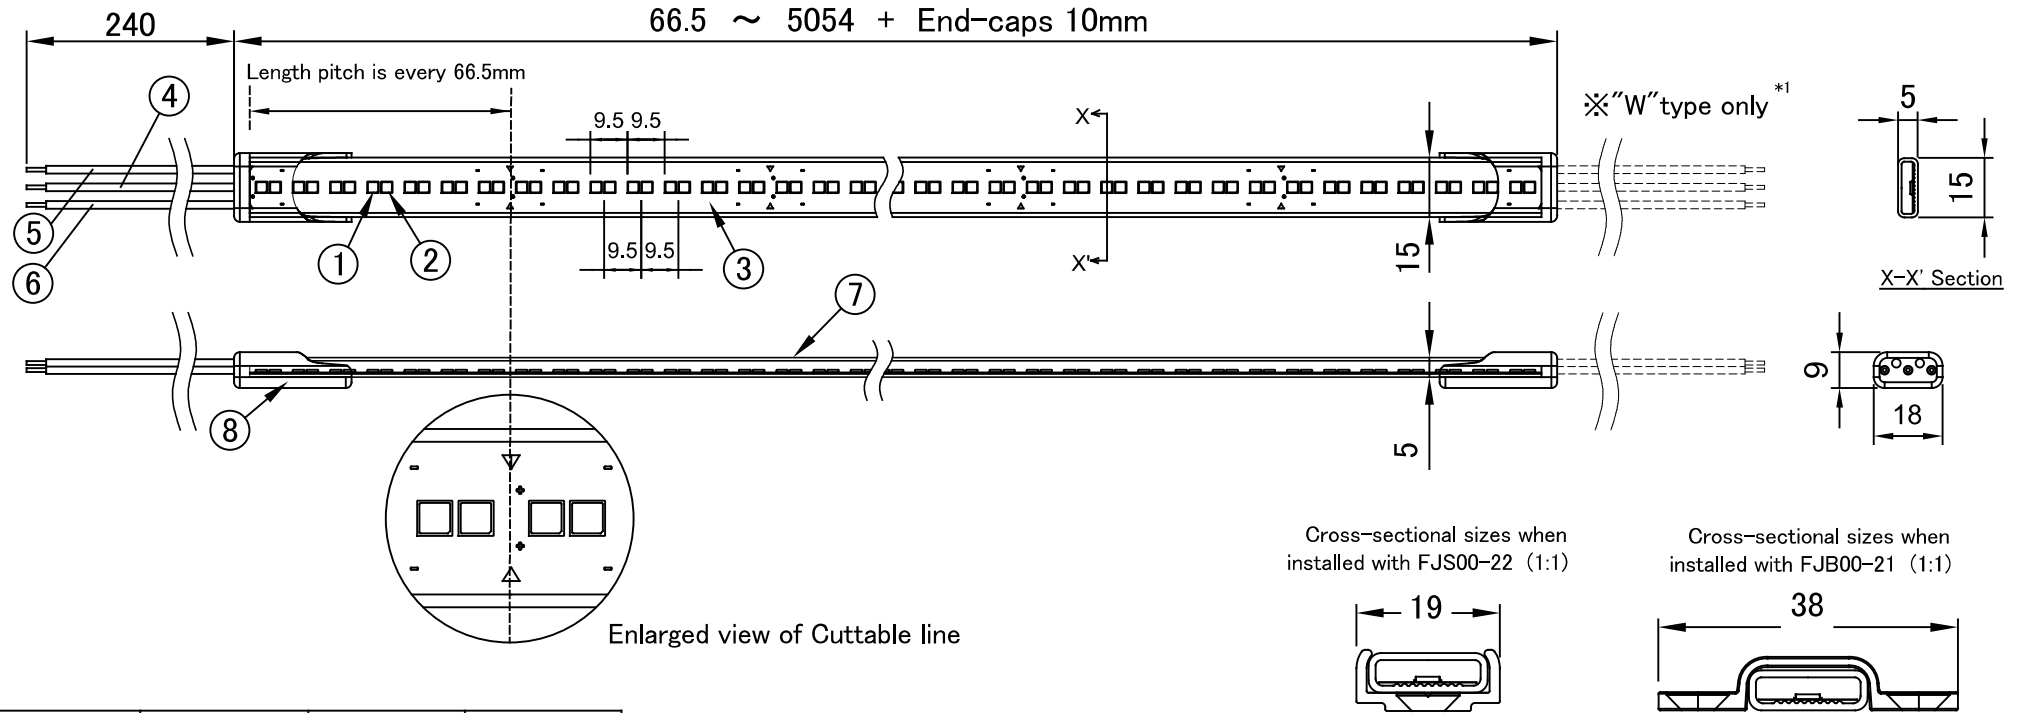

Length(m)	~1	~3	~5
Tolerance(mm)	+10 ~ -11	+10 ~ -16	+10 ~ -20

Product Specifications		8	End Cap	Silicone rubber	Clear
Product No.	TL-TU ("W" type: TL-TUW) *1	7	Case	Silicone rubber	Clear
Length	66.5mm ~ 5054mm + End-caps 10mm	6	Lead Wire (V-) for 2200K	Silicone rubber coating	Yellow, 0.5sq
Weight	130g/m	5	Lead Wire (V-) for 6000K	Silicone rubber coating	White, 0.5sq
Input Voltage	DC24V	4	Lead Wire (V+)	Silicone rubber coating	Red, 0.5sq
Power Consumption	Max.17W/m (2200K only:9W/m, 6000K only:8W/m)	3	FPC	Polyimide	Flexible Printed Circuits
Color Temperature	2200K ~ 6000K	2	LED for 6000K	SMD LED	
Luminous Flux	Max.1950lm/m (2200K only:920lm/m, 6000K only:1030lm/m)	1	LED for 2200K	SMD LED	
Beam Angle	115°		Parts Name	Material	Note
Operating Temperature	-10 ~ 55°C		Accessories (Option)		
Environment	Indoor / Outdoor (IP67 rated)	1	Polycarbonate Rigid Channel (Length=1000mm for straight line installations) : FJS00-22		
Bending Radius	60mm vertical	2	Polycarbonate Mounting Bracket (Use 5pcs per meter) : FJB00-21		
Max Unit Connectable	5m (5054mm + End-caps)	3			
Note	*1 "(Standard)" type : Lead wires at one end. "W" type : Lead wires at both ends.	4			
		5			

Third-angle projection method (Unit : mm)

Drawn	Reviser	Approved
Yamaguchi	Nakashima	Yamaguchi
2022.1.21	2024.4.5	2024.4.5