


TAPE LIGHT DUO INDOOR (Tunable White) **NEW**

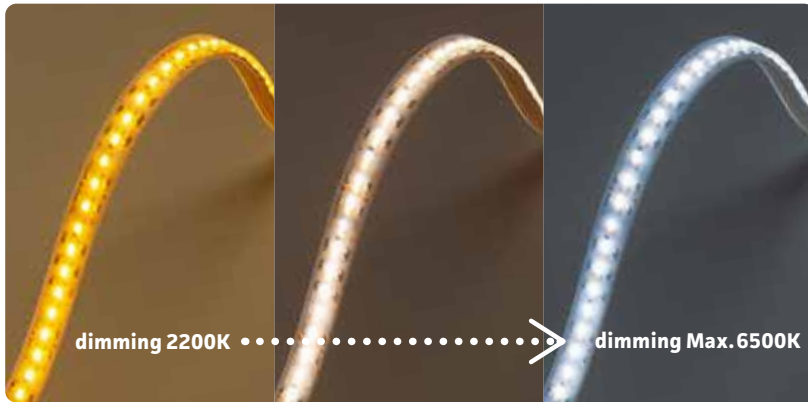

KEY FEATURES AND BENEFITS

- **Flexible LED Strip with Top-Bend**
- **Adjustable CCT range : 2200K~6500K**
- **Max length : 5064mm**
- **Customizable 76 different lengths**
- **LEDs sealed by silicone case**
- **Installation :** See ACCESSORIES for options on mounting channels.
- **Environment :** Interior, dry location use only. Equivalent to IP40 rated.
- **Power and Control :** DMX-512, DALI on/off, and dimming control options. Contact factory for more information.

ORDERING

PRODUCT No.	LENGTH
TM-TU	5064.0
1 PRODUCT	2 LEAD WIRES
3 LENGTH	

1	PRODUCT
TM-TU	Tape Light Duo Indoor (Tunable White)
2	LEAD WIRES
-	Lead wires at one end.
W	Lead wires at both ends.
3	LENGTH
	See length ordering guide.

PRODUCT SPECIFICATIONS

LED	(105+105) LED/m
LED PITCH	9.5 mm
2200K	970 lm/m
6500K	1190 lm/m
INPUT	24VDC
WATTS	17 W/m (2200K : 8.5W/m, 6500K : 8.5W/m)
WIDTH¹	15mm
HEIGHT¹	5 mm
LENGTH²	76.5 mm ~ 5064 mm
WEIGHT	80 g/m
BEAM ANGLE	115°
TRIM POINTS	Every 66.5mm
Max Unit Connectable	5m (5064 mm)
Bending Radius	R60 mm vertical
Operating Temperature	-10° to 40°C

¹End cap is 18w x 9h mm. See DRAWINGS.
²See LENGTH ORDER GUIDE.

PRODUCT No.

Standard	"W" Type ¹	LED COLOR
TM-TU	TM-TUW	2200K/6500K


※Please contact factory if you request other single color and color temperature.
¹"Lead wires at both ends" Type

TAPE LIGHT DUO INDOOR (Tunable White) NEW

LENGTH ORDER CODE GUIDE (LENGTHS INCLUDE END CAPS.)

MM	MM	MM	MM	MM
76.5	1074.0	2071.5	3069.0	4066.5
143.0	1140.5	2138.0	3135.5	4133.0
209.5	1207.0	2204.5	3202.0	4199.5
276.0	1273.5	2271.0	3268.5	4266.0
342.5	1340.0	2337.5	3335.0	4332.5
409.0	1406.5	2404.0	3401.5	4399.0
475.5	1473.0	2470.5	3468.0	4465.5
542.0	1539.5	2537.0	3534.5	4532.0
608.5	1606.0	2603.5	3601.0	4598.5
675.0	1672.5	2670.0	3667.5	4665.0
741.5	1739.0	2736.5	3734.0	4731.5
808.0	1805.5	2803.0	3800.5	4798.0
874.5	1872.0	2869.5	3867.0	4864.5
941.0	1938.5	2936.0	3933.5	4931.0
1007.5	2005.0	3002.5	4000.0	4997.5
				5064.0

DIMENSIONS

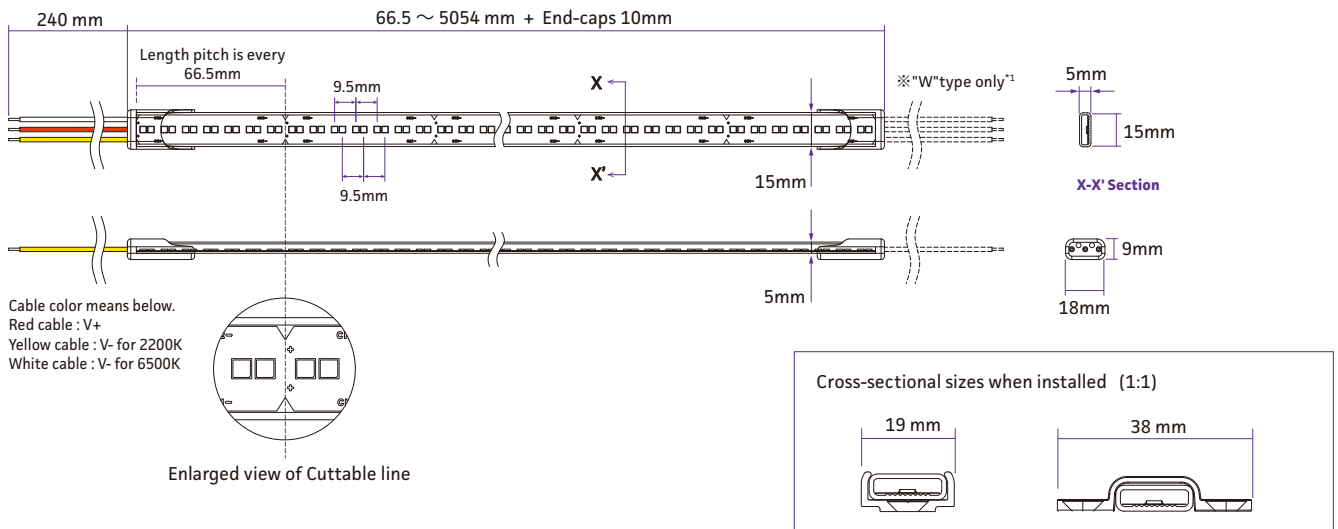

ACCESSORIES¹

POLYCARBONATE CHANNEL

FJS00-22

Rigid channel for straight line installations.
Clear polycarbonate.

Weight : 60g
W x H x L : 18.0 x 8.0 x 1000 mm



POLYCARBONATE MOUNTING BRACKET

FJB00-21(Qty:5pcs per pack)

Mounting bracket for securing Tape Light to any surface with screws (supplied by others). Clear polycarbonate.
Please use 5pcs per meter.

Weight : 0.25g/PC
W x H x L : 37.6 x 7 x 10 mm



¹Select one method for installation. These accessories are not used together. See INSTALLATION.