


# TAPE LIGHT DUO INDOOR ULTRA-HIGH CRI (Tunable White)

**NEW**

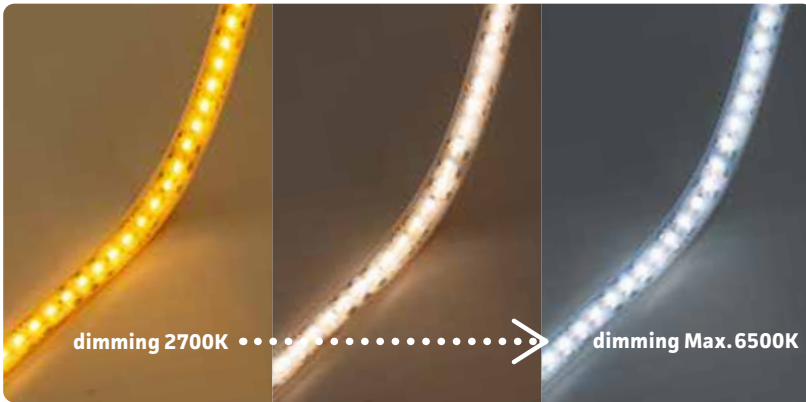

## KEY FEATURES AND BENEFITS

- Flexible LED Strip with Top-Bend
- CRI : 97
- Adjustable CCT range : 2700K~6500K
- Max length : 5064mm
- Customizable 76 different lengths
- LEDs sealed by silicone case
- Installation : See ACCESSORIES for options on mounting channels.
- Environment : Interior, dry location use only. Equivalent to IP40 rated.
- Power and Control : DMX-512, DALI on/off, and dimming control options. Contact factory for more information.

## ORDERING

<b>PRODUCT No.</b>	<b>LENGTH</b>
<b>TM-TU-S97</b>	<b>5064.0</b>
<b>1</b>	<b>2</b>
PRODUCT	LEAD WIRES
<b>3</b>	LENGTH

<b>1</b>	<b>PRODUCT</b>
	<b>TM-TU-S97</b> Tape Light Duo Indoor Ultra-High CRI (Tunable White)
<b>2</b>	<b>LEAD WIRES</b>
	- Lead wires at one end. W Lead wires at both ends.
<b>3</b>	<b>LENGTH</b>
	See length ordering guide.

## PRODUCT SPECIFICATIONS

<b>LED</b>	(105+105) LED/m
<b>LED PITCH</b>	9.5 mm
<b>2700K</b>	780 lm/m
<b>6500K</b>	790 lm/m
<b>INPUT</b>	24VDC
<b>WATTS</b>	17 W/m (2700K : 8.5W/m, 6500K : 8.5W/m)
<b>WIDTH<sup>1</sup></b>	15mm
<b>HEIGHT<sup>1</sup></b>	5 mm
<b>LENGTH<sup>2</sup></b>	76.5 mm ~ 5064 mm
<b>WEIGHT</b>	80 g/m
<b>BEAM ANGLE</b>	115°
<b>TRIM POINTS</b>	Every 66.5mm
<b>Max Unit Connectable</b>	5m (5064 mm)
<b>Bending Radius</b>	R60 mm vertical
<b>Operating Temperature</b>	-10° to 40°C

<sup>1</sup>End cap is 18w x 9h mm. See DRAWINGS.  
<sup>2</sup>See LENGTH ORDER GUIDE.

## PRODUCT No.

<b>Standard</b>	<b>"W" Type<sup>1</sup></b>	<b>LED COLOR</b>
<b>TM-TU-S97</b>	<b>TM-TU-S97W</b>	<b>2700K/6500K</b>

※Please contact factory if you request other single color and color temperature.  
<sup>1</sup>"Lead wires at both ends" Type


# TAPE LIGHT DUO INDOOR ULTRA-HIGH CRI(Tunable White)

**NEW**

## LENGTH ORDER CODE GUIDE (LENGTHS INCLUDE END CAPS. )

MM	MM	MM	MM	MM
76.5	1074.0	2071.5	3069.0	4066.5
143.0	1140.5	2138.0	3135.5	4133.0
209.5	1207.0	2204.5	3202.0	4199.5
276.0	1273.5	2271.0	3268.5	4266.0
342.5	1340.0	2337.5	3335.0	4332.5
409.0	1406.5	2404.0	3401.5	4399.0
475.5	1473.0	2470.5	3468.0	4465.5
542.0	1539.5	2537.0	3534.5	4532.0
608.5	1606.0	2603.5	3601.0	4598.5
675.0	1672.5	2670.0	3667.5	4665.0
741.5	1739.0	2736.5	3734.0	4731.5
808.0	1805.5	2803.0	3800.5	4798.0
874.5	1872.0	2869.5	3867.0	4864.5
941.0	1938.5	2936.0	3933.5	4931.0
1007.5	2005.0	3002.5	4000.0	4997.5
				5064.0

## DIMENSIONS

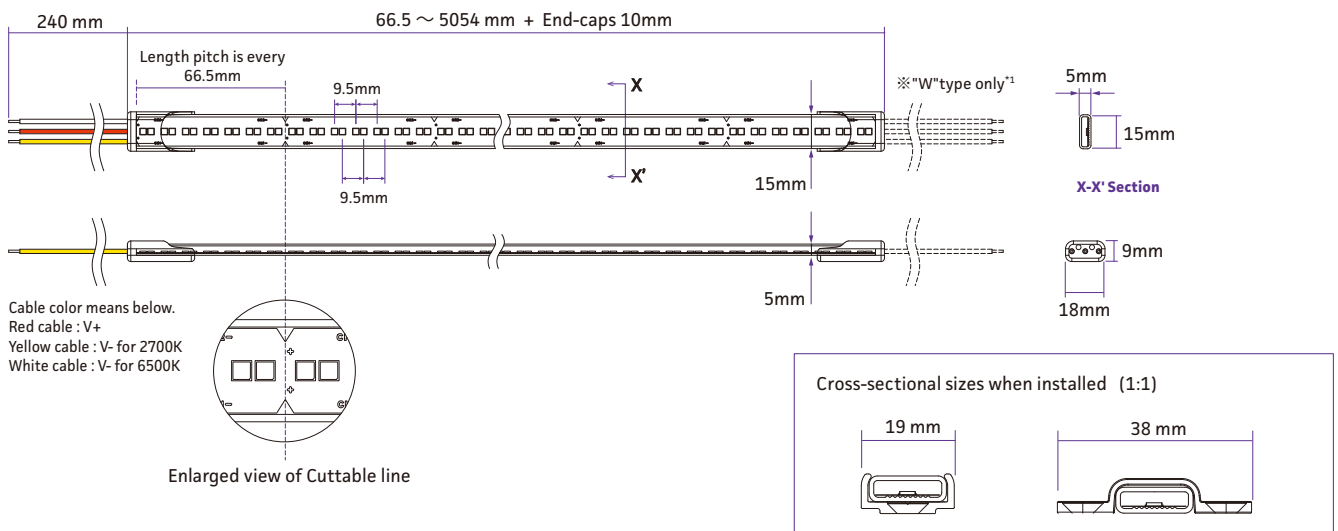

## ACCESSORIES<sup>1</sup>

### POLYCARBONATE CHANNEL

#### FJS00-22

Rigid channel for straight line installations.  
Clear polycarbonate.

Weight : 60g  
W x H x L : 18.0 x 8.0 x 1000 mm



### POLYCARBONATE MOUNTING BRACKET

#### FJB00-21(Qty:5pcs per pack)

Mounting bracket for securing Tape Light to any surface with screws (supplied by others). Clear polycarbonate.  
Please use 5pcs per meter.

Weight : 0.25g/PC  
W x H x L : 37.6 x 7 x 10 mm



<sup>1</sup>Select one method for installation. These accessories are not used together. See INSTALLATION.