

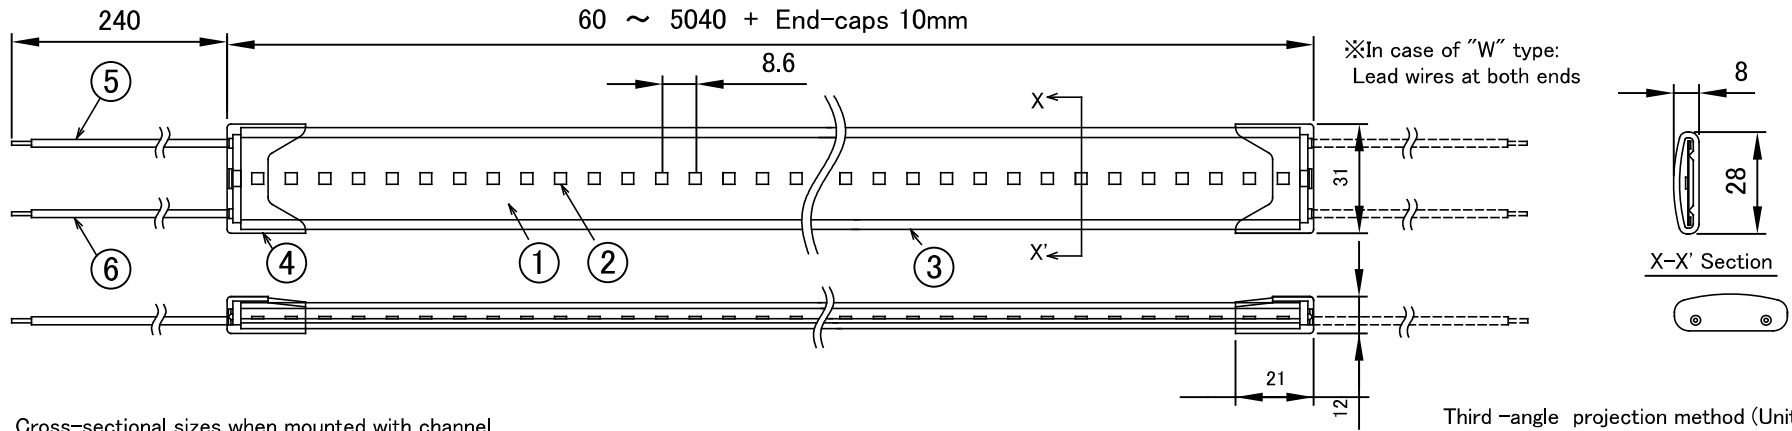


Product Name	Tape Light Wide Indoor	TM08	Scale	1: 2 (A4)
--------------	-------------------------------	-------------	-------	------------------

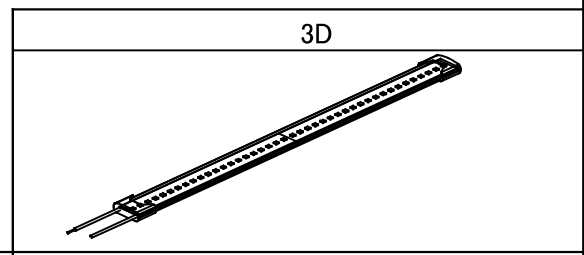

Third-angle projection method (Unit : mm)

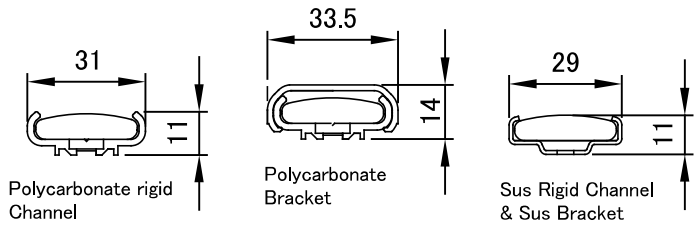

Length(m)	~1	~3	~5
Tolerance(mm)	+10 ~ -8	+10 ~ -14	+10 ~ -20

Product Specifications							
Product No.	TM08-090W□□K ("W" type: TM08-090W□□KW)						
Length	60mm ~ 5040mm + End-caps 10mm						
Cutting points	60mm (7 LED) *Customized length order available						
Weight	180g/m						
Input Voltage	DC24V ±1%	Power Consumption			28W/m		
Color Temperature	2000K	2500K	2800K	3000K	3500K	4000K	5000K
Luminous Flux	2050 lm/m	2350 lm/m	3000 lm/m	3230 lm/m	3250 lm/m	3250lm/m	3290 lm/m
Beam Angle	120°						
Operating Temperature	-10 ~ 40°C						
Environment	Indoor only						
Bending Radius	60mm vertical						
Max. units connectable	5m (5040mm + End-caps)						
Note	"(Standard)" type : Lead wires at one end.						
	"W" type : Lead wires at both ends.						
	"□□" : 2 digit of the color temperature. (ex. 30 = 3000K)						

Notice of Installation

Please do not use the product in the closed space.
 Allow for proper air flow.
 The ambient temperature must remain the product specification.
 If the product is used the areas that become higher than the ambient temperature, it may cause damages
 electrifications smoke.
 Required space for installation is as below.

Accessories		
1	Polycarbonate Rigid channel Length=1000mm for straight line installations. FJS00-TW	
2	Polycarbonate Bracket 5 pieces per meter for flexible line installations. FJS00-TW01	
3	SUS Rigid channel Length=1000mm for straight line installations. FAS00-TW	
4	SUS Bracket 5 pieces per meter for flexible line installations. FAS00-TW01	
6	Lead wire Black(V-)	Silicone rubber coating
5	Lead wire Red(V+)	Silicone rubber coating
4	End Cap	Silicone rubber
3	Case	Silicone rubber
2	LED	SMD LED
1	FPC	
Parts List		Note
Drawn	Reviser	Approval
Sakamoto Yamaguchi	Hashimoto	Yamaguchi
2017.1.5	2024.4.29	2024.4.30

Please note that content described above may be changed without any advance notice.

Atex Co., Ltd.

Ver 240429