

TAPE LIGHT INDOOR

WHITE LEDS



KEY FEATURES AND BENEFITS

- 7 color variation
 - Max length 10m
 - Customizable 152 different lengths
 - Top-Bend
 - Clear type
 - Optimum item for Indirect Lighting
 - LEDs covered by Silicone Case
 - Installation : See ACCESSORIES for options on mounting channels and brackets.
 - Environment : Interior, dry location use only.
 - LED : 3 step MacAdam ellipses
 - Power and Control : DMX-512, on/off, and dimming control options.
- Contact factory for more information.

ORDERING

PRODUCT No.

TM	09	- 091A	20K	10118.0
1	2		3	4
PRODUCT	OUTPUT		LED COLOR	LEAD WIRES

1 PRODUCT	4 LEAD WIRES
TM Tape Light Indoor	- Lead wires at one end. W Lead wires at both ends.
2 OUTPUT	5 LENGTH
09 LED 9.5 mm pitch	See length ordering guide.
3 LED COLOR	
20K 2000K	
25K 2500K	
27K 2700K	
30K 3000K	
35K 3500K	
40K 4000K	
50K 5000K	

PRODUCT SPECIFICATIONS

LED	105/m
LED PITCH	9.5 mm
2000K	930 lm/m
2500K	1090 lm/m
2700K	1300 lm/m
3000K	1390 lm/m
3500K	1410 lm/m
4000K	1430 lm/m
5000K	1430 lm/m
INPUT	24VDC
WATTS	11 W/m
WIDTH1	15 mm
HEIGHT1	5 mm
LENGTH2	76.5 mm ~ 10118 mm
WEIGHT	70g (2.8oz) per meter
BEAM ANGLE	115°
TRIM POINTS	Every 66.5 mm
Max Unit Connectable	10113 m
Bending Radius	30mm vertical
Operating Temperature	-10° to 50°C

¹End cap is 17w x 7h mm (11/16 x 1/4 in). See DRAWINGS.

²Standard. See LENGTH ORDER GUIDE.

PRODUCT No.

Standard	"W" Type ¹	LED COLOR
TM09-091A20K	TM09-091A20KW	2000K
TM09-091A25K	TM09-091A25KW	2500K
TM09-091A27K	TM09-091A27KW	2700K
TM09-091A30K	TM09-091A30KW	3000K
TM09-091A35K	TM09-091A35KW	3500K
TM09-091A40K	TM09-091A40KW	4000K
TM09-091A50K	TM09-091A50KW	5000K

¹"Lead wires at both ends" Type

TAPE LIGHT INDOOR

WHITE LEDS


LENGTH ORDER CODE GUIDE (LENGTHS INCLUDE END CAPS.)

TM09 MODELS


MM	MM	MM	MM	MM	MM	MM	MM	MM
76.5	1207.0	2337.5	3468.0	4598.5	5729.0	6859.5	7990.0	9120.5
143.0	1273.5	2404.0	3534.5	4665.0	5795.5	6926.0	8056.5	9187.0
209.5	1340.0	2470.5	3601.0	4731.5	5862.0	6992.5	8123.0	9253.5
276.0	1406.5	2537.0	3667.5	4798.0	5928.5	7059.0	8189.5	9320.0
342.5	1473.0	2603.5	3734.0	4864.5	5995.0	7125.5	8256.0	9386.5
409.0	1539.5	2670.0	3800.5	4931.0	6061.5	7192.0	8322.5	9453.0
475.5	1606.0	2736.5	3867.0	4997.5	6128.0	7258.5	8389.0	9519.5
542.0	1672.5	2803.0	3933.5	5064.0	6194.5	7325.0	8455.5	9586.0
608.5	1739.0	2869.5	4000.0	5130.5	6261.0	7391.5	8522.0	9652.5
675.0	1805.5	2936.0	4066.5	5197.0	6327.5	7458.0	8588.5	9719.0
741.5	1872.0	3002.5	4133.0	5263.5	6394.0	7524.5	8655.0	9785.5
808.0	1938.5	3069.0	4199.5	5330.0	6460.5	7591.0	8721.5	9852.0
874.5	2005.0	3135.5	4266.0	5396.5	6527.0	7657.5	8788.0	9918.5
941.0	2071.5	3202.0	4332.5	5463.0	6593.5	7724.0	8854.5	9985.0
1007.5	2138.0	3268.5	4399.0	5529.5	6660.0	7790.5	8921.0	10051.5
1074.0	2204.5	3335.0	4465.5	5596.0	6726.5	7857.0	8987.5	10118.0
1140.5	2271.0	3401.5	4532.0	5662.5	6793.0	7923.5	9054.0	

DIMENSIONS

TOP VIEW

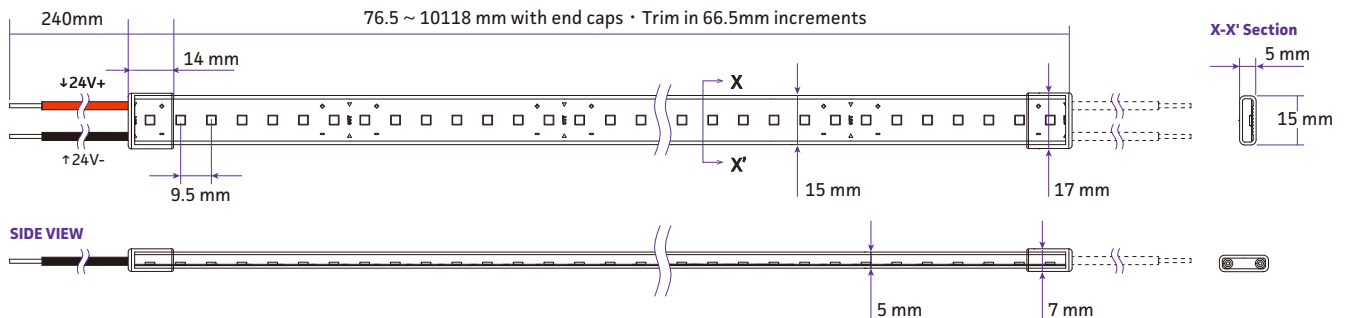

SIDE VIEW

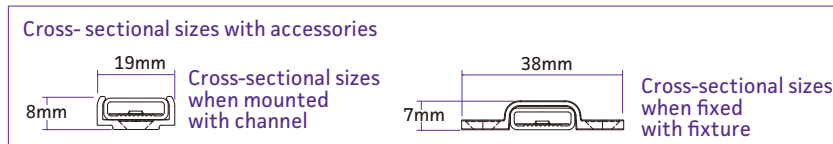

ACCESSORIES ¹

POLYCARBONATE CHANNEL

☐ FJS00-22

Rigid channel for straight line installations. Clear polycarbonate.

Weight : 60g
W x H x L : 18.0 x 8.0 x 1000 mm



POLYCARBONATE MOUNTING BRACKET

☐ FJB00-21(Qty:5pcs per pack)

Mounting bracket for securing Tape Light to any surface with screws (supplied by others). Clear polycarbonate. Please use 5pcs per meter.

Weight : 0.25g/PC
W x H x L : 37.6 x 7 x 10 mm



¹Select one method for installation. These accessories are not used together. See INSTALLATION.