
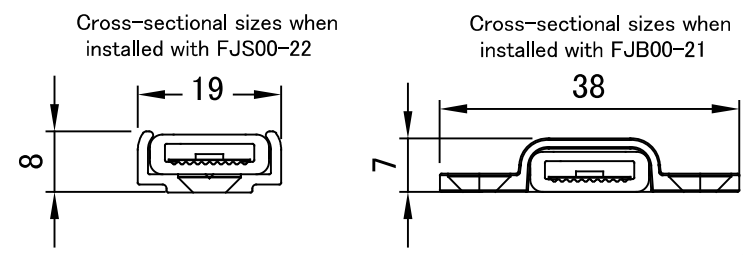


Product Name	Tape Light Indoor (TM09 / 9.5 mm pitch)	Scale	1:2 (A4)
--------------	--	-------	----------

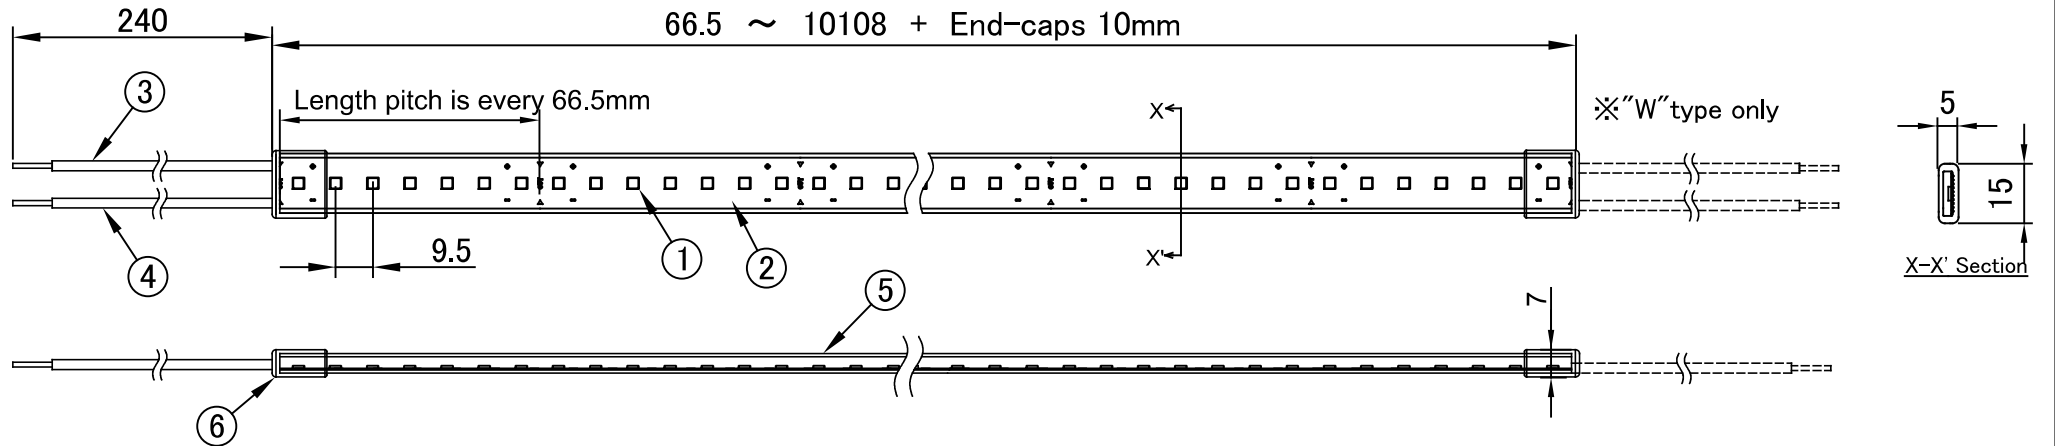

Third-angle projection method (Unit : mm)

Product Specifications								8				3D		
Product No.	TM09-091A□□K ("W" type: TM09-091A□□KW)							7						
Length	66.5mm ~ 10108mm + End-caps 10mm							6	End Cap	Silicone rubber	Translucent			
Weight	70g/m							5	Case	Silicone rubber	Clear			
Input Voltage	DC24V							4	Lead Wire (V-)	Silicone rubber coating	Black			
Power Consumption	11W/m							3	Lead Wire (V+)	Silicone rubber coating	Red			
Color Temperature	2000K	2500K	2700K	3000K	3500K	4000K	5000K	2	FPC	Polyimide	Flexible Printed Circuits			
Luminous Flux	930lm/m	1090lm/m	1300lm/m	1390lm/m	1410lm/m	1430lm/m	1430lm/m	1	LED	SMD LED				
Beam Angle	115°													
operating Temperature	-10 ~ 50°C													
Environment	Indoor only													
Bending Radius	30mm vertical													
Max Unit Connectable	10.1m (10108mm + End-caps)													
Note	"(Standard)" type : Lead wires at one end. "W" type : Lead wires at both ends. "□□" means the first two digits of the colour temperature of the product.													
								Parts List						
								Accessories (Option)						
								1	Polycarbonate Rigid Channel (Length=1000mm for straight line installation) : FJS00-22					
								2	Polycarbonate Mounting Bracket (Use 5pcs per meter) : FJB00-21					
								3				Drawn		
								4				Hashimoto		
								5				Yamaguchi		
											yamaguchi			
											2019.9.4			
											2024.3.15			
											2024.3.15			