

TAPE LIGHT INDOOR V

WHITE LEDS



KEY FEATURES AND BENEFITS

- **8 color variation**
- **Customizable 88 different lengths**
- **Top-Bend**
- **Clear type**
- **Optimum item for Indirect Lighting**
- **LEDs covered by Silicone Case**
- **Installation** : See ACCESSORIES for options on mounting channels and brackets.
- **Environment** : Interior, dry location use only.
LED : 3 step MacAdam ellipses
- **Power and Control** : DMX-512, on/off, and dimming control options.
Contact factory for more information.

ORDERING

PRODUCT No.	LENGTH	
TMV10	22K	5026
1	2	3
PRODUCT	LED COLOR	LENGTH

1 PRODUCT

TMV10 Tape Light Indoor V

2 LED COLOR

22K	2200K
25K	2500K
27K	2700K
30K	3000K
35K	3500K
40K	4000K
50K	5000K
65K	6500K

3 LENGTH

See length ordering guide.

PRODUCT SPECIFICATIONS

LED	108/m
LED PITCH	9.5 mm
2200K	880 lm/m
2500K	860 lm/m
2700K	1070 lm/m
3000K	1080 lm/m
3500K	1110 lm/m
4000K	1130 lm/m
5000K	1110 lm/m
6500K	1070 lm/m
INPUT	24VDC
WATTS	9 W/m
WIDTH ¹	15 mm
HEIGHT ¹	5 mm
LENGTH ²	67 mm ~ 5026 mm
WEIGHT	90g /m
BEAM ANGLE	110°
TRIM POINTS	Every 57 mm
Max Unit Connectable	5 m
Bending Radius	30mm vertical
Operating Temperature	-10° to 40°C

¹End cap is 17w x 7h mm (11/16 x 1/4 in). See DRAWINGS.
²Standard. See LENGTH ORDER GUIDE.

PRODUCT No.

Standard	LED COLOR
TMV10-22K	2200K
TMV10-25K	2500K
TMV10-27K	2700K
TMV10-30K	3000K
TMV10-35K	3500K
TMV10-40K	4000K
TMV10-50K	5000K
TMV10-65K	6500K

¹Lead wires at both ends* Type

TAPE LIGHT INDOOR V

WHITE LEDS


LENGTH ORDER CODE GUIDE (LENGTHS INCLUDE END CAPS.)

TMV10 MODELS


67	637	1207	1777	2347	2917	3487	4057	4627
124	694	1264	1834	2404	2974	3544	4114	4684
181	751	1321	1891	2461	3031	3601	4171	4741
238	808	1378	1948	2518	3088	3658	4228	4798
295	865	1435	2005	2575	3145	3715	4285	4855
352	922	1492	2062	2632	3202	3772	4342	4912
409	979	1549	2119	2689	3259	3829	4399	4969
466	1036	1606	2176	2746	3316	3886	4456	5026
523	1093	1663	2233	2803	3373	3943	4513	
580	1150	1720	2290	2860	3430	4000	4570	

DIMENSIONS



TOP VIEW

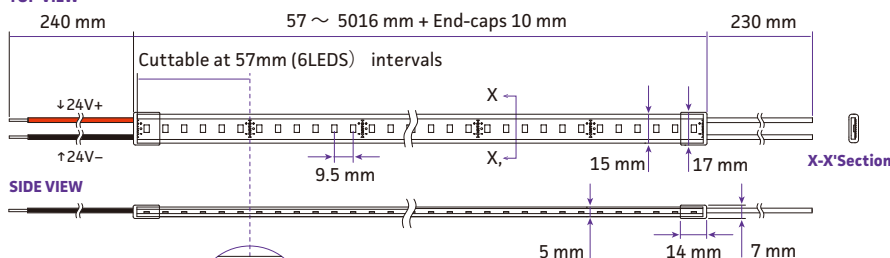

Cross-sectional sizes when mounted with channel (FJS00-22)



Cross-sectional sizes when fixed with fixture (FJB00-21)



Note:

When connecting products and power supplies in parallel in multiple systems, make sure that the types and length of the wires in each system are the same to prevent differences in brightness and color between the products.

ACCESSORIES¹

POLYCARBONATE CHANNEL

FJS00-22

Rigid channel for straight line installations. Clear polycarbonate.

Weight : 60g
W x H x L : 18.0 x 8.0 x 1000 mm



POLYCARBONATE MOUNTING BRACKET

FJB00-21 (Qty: 5pcs per pack)

Mounting bracket for securing Tape Light to any surface with screws (supplied by others). Clear polycarbonate. Please use 5pcs per meter.

Weight : 0.25g/PC
W x H x L : 37.6 x 7 x 10 mm



¹Select one method for installation. These accessories are not used together. See INSTALLATION.

