

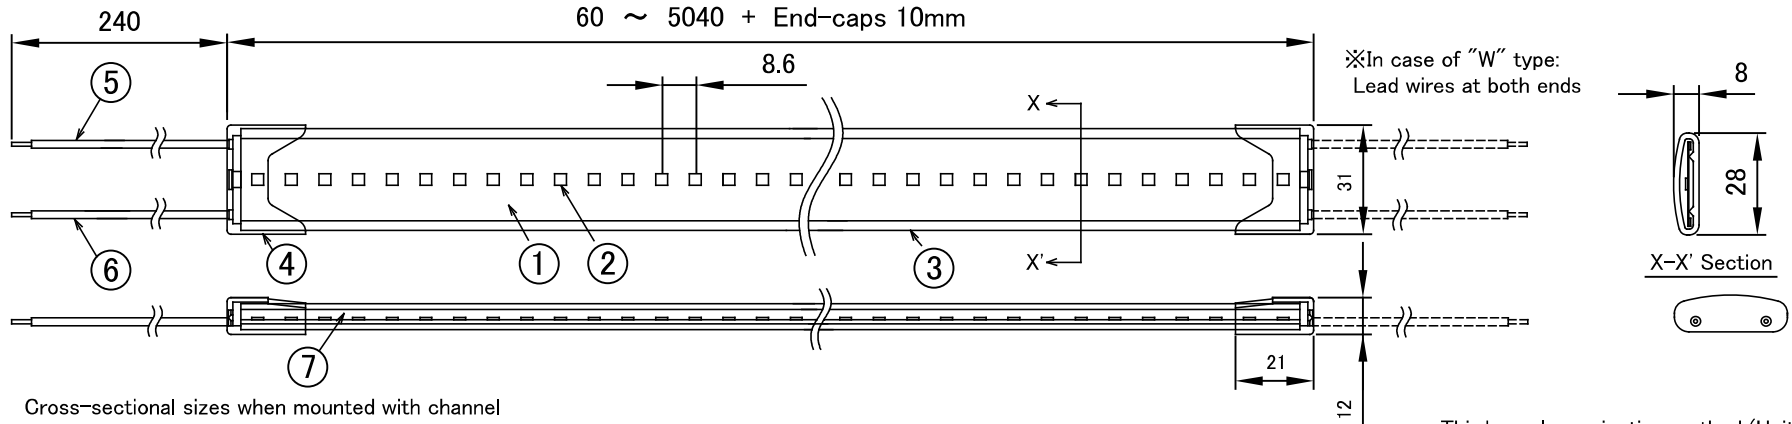


Product Name	Tape Light Wide	TL08	Scale	1: 2 (A4)
--------------	------------------------	-------------	-------	------------------

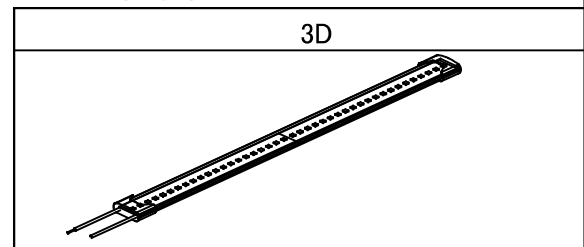

Cross-sectional sizes when mounted with channel

Third-angle projection method (Unit : mm)

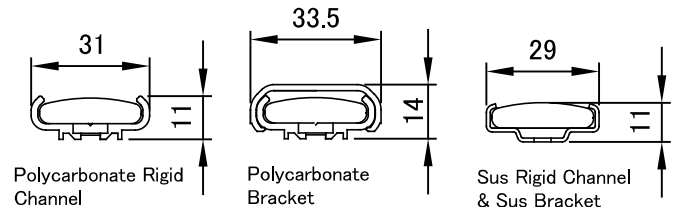

Length(m)	~1	~3	~5
Tolerance(mm)	+10 ~ -8	+10 ~ -14	+10 ~ -20

Product Specifications							
Product No.	TL08-090W□□K ("W" type: TL08-090W□□KW)						
Length	60mm ~ 5040mm + End-caps 10mm						
Cutting points	60mm (7 LED) *Customized length order available						
Weight	220g/m						
Input Voltage	DC24V ±1%						
Color Temperature	2200K	2500K	2800K	3000K	3500K	4000K	5000K
Luminous Flux	2000 lm/m	2260 lm/m	2420 lm/m	2470 lm/m	2980 lm/m	3150 lm/m	3120 lm/m
Power Consumption	28W/m (2200K only : 20W/m)						
Beam Angle	120°						
Operating Temperature	-10 ~ 50°C						
Environment	IP67 rated. Water and dust resistant. Product should not reside in standing water.						
Bending Radius	60mm vertical						
Max. units connectable	5m (5040mm + End-caps)						
Note	"(Standard)" type : Lead wires at one end. "W" type : Lead wires at both ends.						
	"□□" : 2 digit of the color temperature. (ex. 30 = 3000K)						

Notice of Installation

Please do not use the product in the closed space. Allow for proper air flow. The ambient temperature must remain the product specification. If the product is used the areas that become higher than the ambient temperature, it may cause damages *electrifications* smoke. Required space for installation is as below.

Accessories			
1	SUS Rigid channel Length=1000mm for straight line installations. FAS00-TW		
2	SUS Bracket 5 pieces per meter for flexible line installations. FAS00-TW01		
7	Insert	Silicone	
6	Lead wire Black(V-)	Silicone rubber coating	
5	Lead wire Red(V+)	Silicone rubber coating	
4	End Cap	Silicone rubber	
3	Case	Silicone rubber	
2	LED	SMD LED	
1	FPC		
Parts List		Note	
Drawn	Reviser	Approval	
Sakamoto Yamaguchi	Nakashima		
2017.1.5	2024.4.5		
		2024.4.5	

Please note that content described above may be changed without any advance notice.